


| Features                 |             |
|--------------------------|-------------|
| Maximum working pressure | 1000psig    |
| Working temperature      | -54~ 204 °C |

| IDX | Component  | Material |
|-----|------------|----------|
| 1   | Flange     | 316 L    |
| 2   | Ball valve | 316 L    |
| 3   | Main Line  | 316 L    |
| 4   | Pipe Plug  | 316 L    |

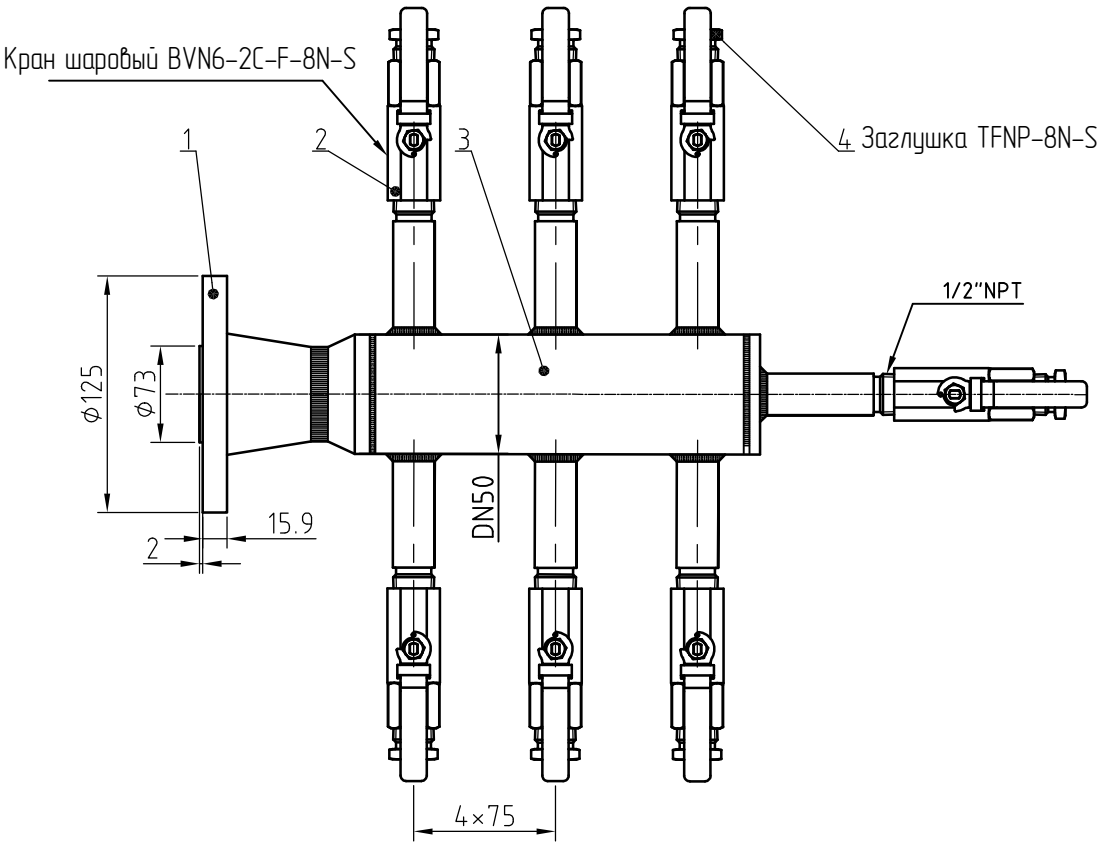

NOTES:

1.Dimensions for reference only.

2.End connettion according as ASME B16.5-2003

DN40 CLASS150 RF Flange;

|                         |           |      |                       |   |            |                                                  |
|-------------------------|-----------|------|-----------------------|---|------------|--------------------------------------------------|
| Linear unit of size: mm |           |      | Воздухораспределитель |   |            | <b>НТА-ПРОМ</b><br>ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС     |
|                         | signature | date |                       |   |            |                                                  |
| design                  |           |      | versions              | 1 | proportion | 1:4                                              |
| audit                   |           |      |                       |   |            | ADM1-22-D6-F24C1-B6F8NP-B6F8NP-S<br><br>Page 1/1 |
| ratify                  |           |      |                       |   |            |                                                  |