



Valve Features	
Maximum working pressure	6000psig
Working temperature	-54℃~232℃
Orifice	4mm
CV	0.35

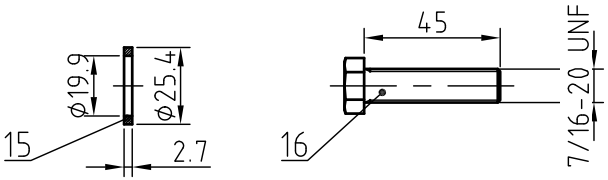

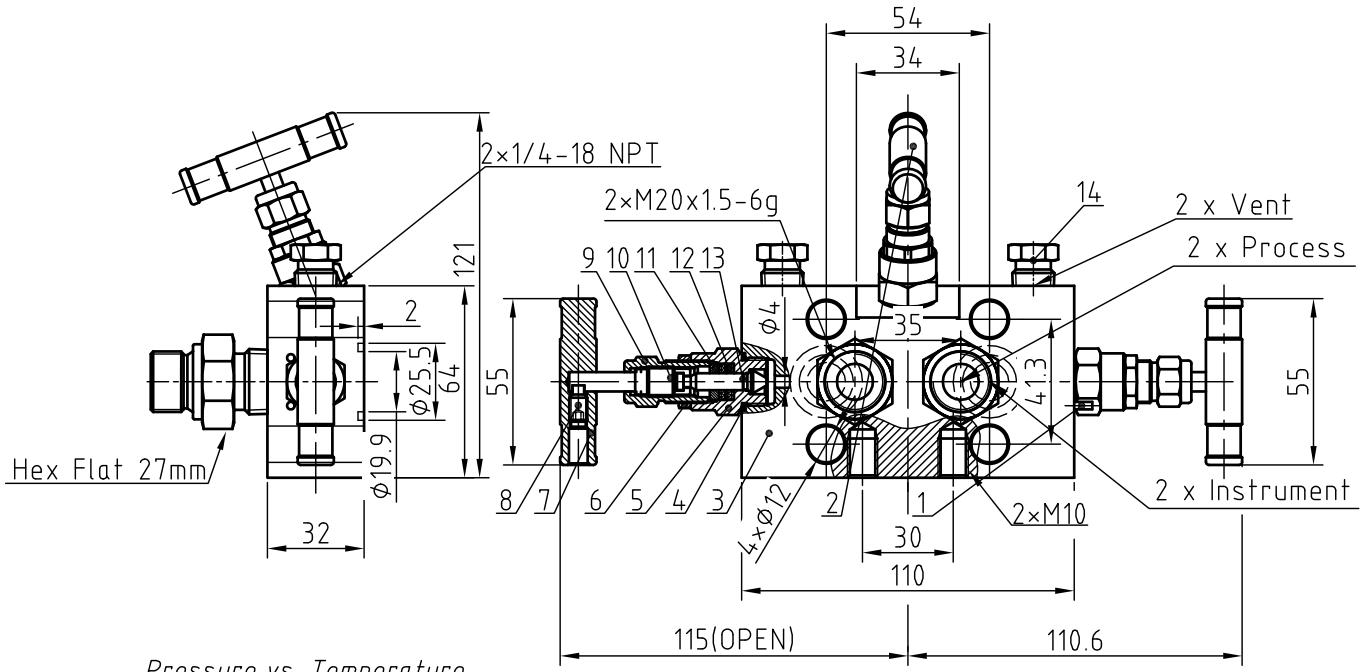

IDX	Designation	Materials
1	Grooved pin	Stainless Steel
2	Handle	Anodized Aluminium
3	Body	316 L/A479
4	Gasket	316 L/A479
5	Bonnet	316 L/A479
6	Lock nut	316 L/A479
7	Handle	Anodized Aluminium
8	Set screw	Stainless Steel
9	Gland	316 L/A479
10	Upper Stem	316 L/A479
11	Packing Seat	316 L/A479
12	Padding	PTFE
13	Lower Stem	316 L/A479
14	Pipe Plug	316 L/A479
15	Gasket	316 L/A479
16	Bolt	Galvanized Carbon Steel

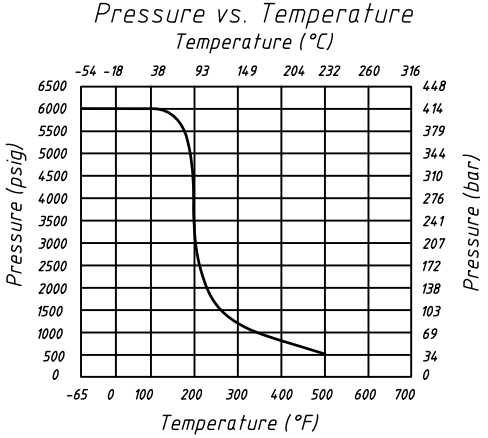



NOTE:Dimensions for reference only.

Linear unit of size: mm			3-Valve Manifolds				НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date					
design			versions	1	proportion	1:2.5	MN3V-2-D1-M20M15-IB-P4N-NTA-S
audit							
ratify					Page 1/1		