



Valve Features	
Maximum working pressure	6000 psig
Working temperature	-54 °C~649 °C
Orifice	4mm
Cv	0.35

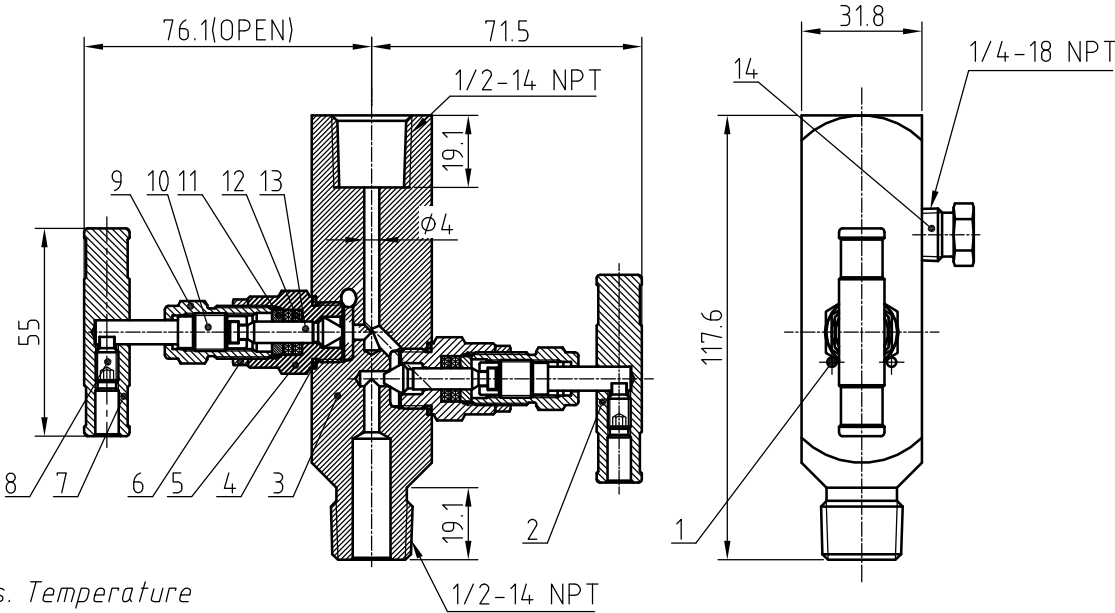


Pressure vs. Temperature
Temperature (°C)

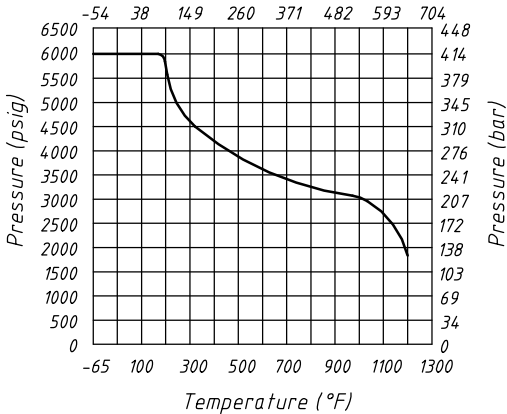

NOTE:Dimensions for reference only.

IDX	Designation	Materials
1	Lock Pin	Stainless Steels
2	Handle	Anodized Aluminium
3	Body	316 L/A4 79
4	Joint Seal	316 L/A4 79
5	Bonnet	316 L/A4 79
6	Lock Nut	316 L/A4 79
7	Handle	Anodized Aluminium
8	Set Screw	Stainless Steels
9	Packing Bolt	316 L/A4 79
10	Upper Stem	316 L/A4 79
11	Packing Gland	316 L/A4 79
12	Packing	Graphite
13	Lower Stem	316 L/A4 79
14	Thread Plug	316 L/A4 79

Linear unit of size: mm			2-valve Manifold			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
signature	date					
design			versions	1	proportion	1:2
audit						V2N-2-MF-8N-GF-S
ratify						
			Page 1/1			