

| Valve Features | |
|---|---|
| Maximum working pressure | 3000 psig |
| Working temperature | -54℃~232℃ |
| Orifice | 4mm |
| Cv | 0.35 |

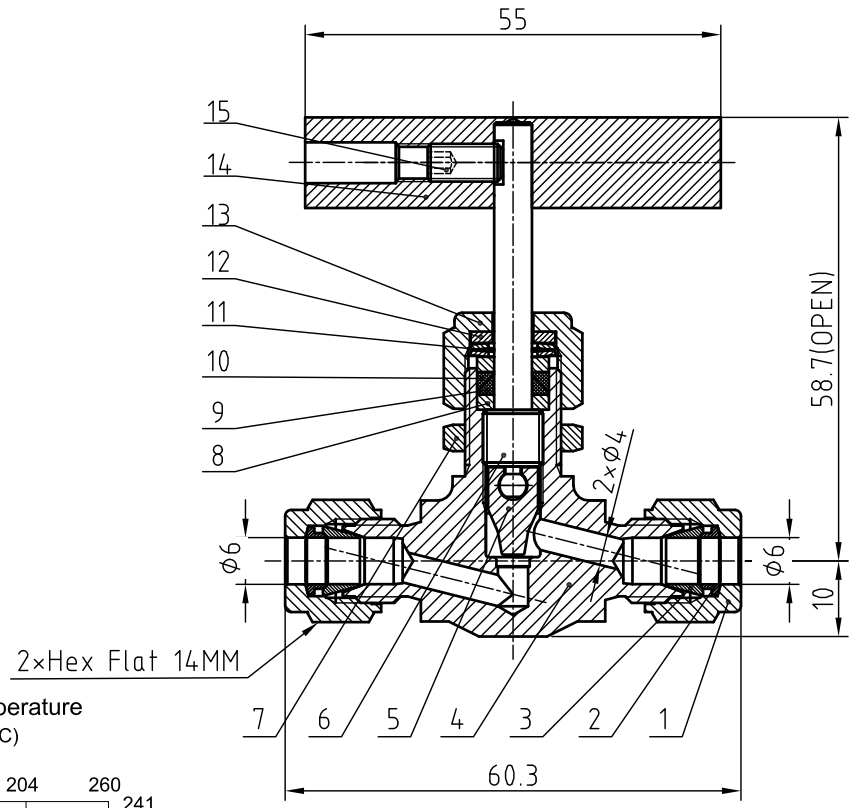


| IDX | Component | Materials |
|---|---|---|
| 1 | Nut | 316L/A479 |
| 2 | Rear Ferrule | 316L/A479 |
| 3 | Front Ferrule | 316L/A479 |
| 4 | Body | F316 L/A182 |
| 5 | Stem Tip | 316L/A479 |
| 6 | Stem | 316L/A479 |
| 7 | Panel Nut | 316L/A479 |
| 8 | Packing Washer | 316L/A479 |
| 9 | Lower Packing | PTFE |
| 10 | Upper Packing | PTFE |
| 11 | Packing Spring | S17700/A693 |
| 12 | Washer | 316L/A479 |
| 13 | Packing Bolt | 316L/A479 |
| 14 | Handle | Stainless Steel |
| 15 | Set Screw | Stainless Steel |

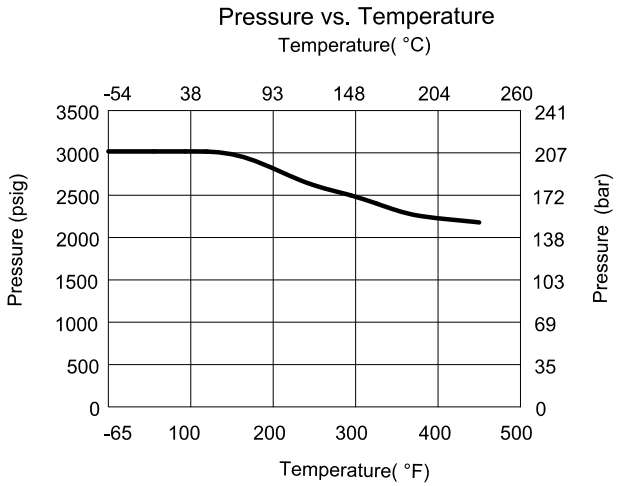


NOTE:Dimensions for reference only.

| Linear unit of size: mm | | | Needle Valve | | | | НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС |
|---|---|---|---|---|---|---|---|
| | signature | date | | | | | |
| design | | | versions | 1 | proportion | 1:1 | VN4-2B-D-6M-R-SH-N-S |
| audit | | | | | | | |
| ratify | | | | | Page 1/1 | | |