




Valve Features	
Maximum working pressure	6000 psig
Working temperature	-54 °C~649 °C
Orifice	4.0mm
Cv	0.35

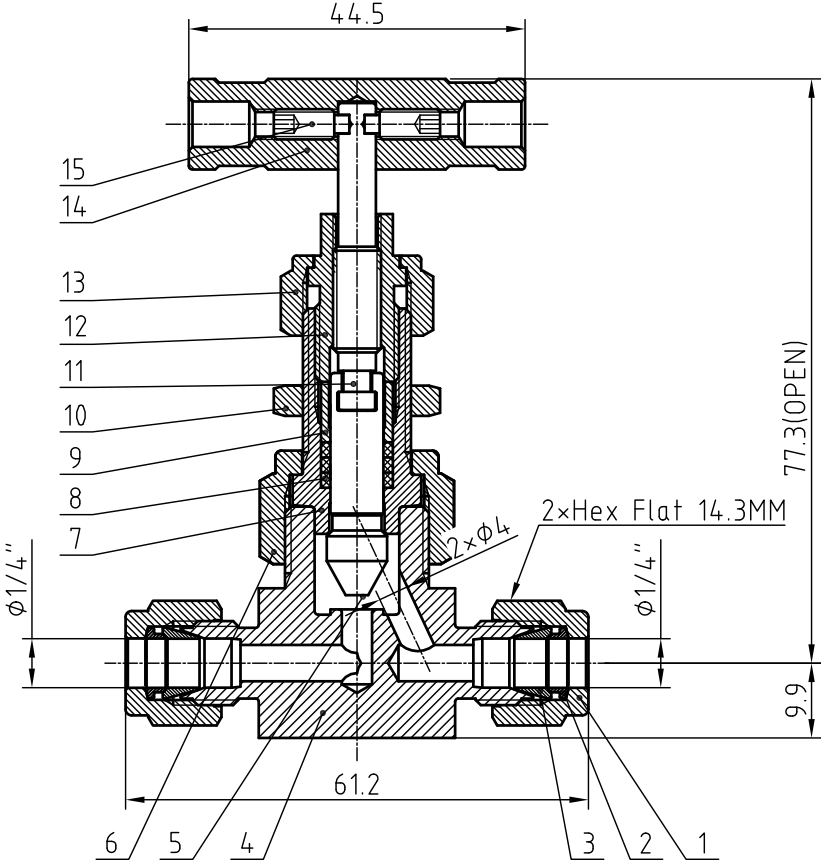

Item	Component	Material
1	Nut	316 L/A4 79
2	Rear Ferrule	316 L/A4 79
3	Front Ferrule	316 L/A4 79
4	Body	316 L/A4 79
5	Lower Stem	316 L/A4 79
6	Union Nut	316 L/A4 79
7	Bonnet	316 L/A4 79
8	Packing	Graphite
9	Gland	316 L/A4 79
10	Panel Nut	316 L/A4 79
11	Upper Stem	316 L/A4 79
12	Packing Bolt	316 L/A4 79
13	Locking Nut	316 L/A4 79
14	Handle	6061/B211
15	Set Screw	Stainless Steel

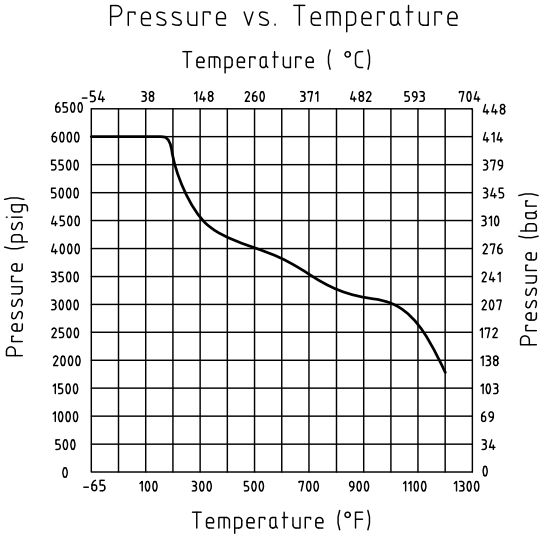

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit			 Page 1/1			VN8-2A-D-4T-GF-N-S
ratify						