



| Valve Features | |
|--------------------------|--------------------|
| Maximum working pressure | 6000 psig (413bar) |
| Working temperature | -54°C~232°C |
| Orifice | 0.25in.(6.4mm) |
| Cv | 0.86 |

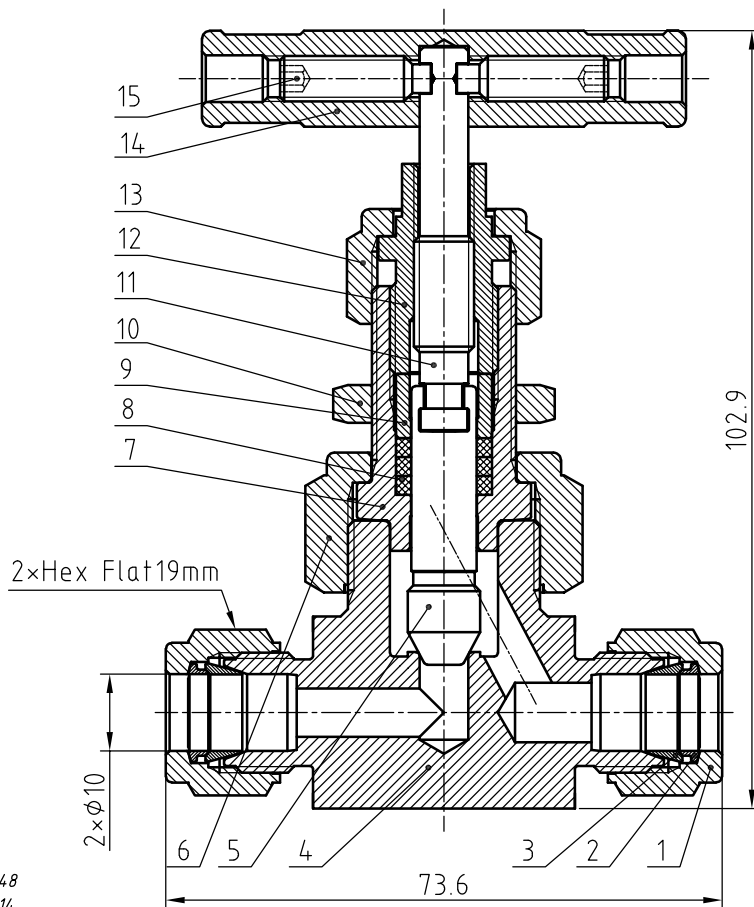

| item | Component | Materials |
|------|----------------|--------------------|
| 1 | Nut | 316 L/A4 79 |
| 2 | Rear Ferrules | 316 L/A4 79 |
| 3 | Front Ferrules | 316 L/A4 79 |
| 4 | Body | 316 L/A4 79 |
| 5 | Lower Stem | 316 L/A4 79 |
| 6 | Union Nut | 316 L/A4 79 |
| 7 | Bonnet | 316 L/A4 79 |
| 8 | Packing | PTFE |
| 9 | Gland | 316 L/A4 79 |
| 10 | Panel Nut | 316 L/A4 79 |
| 11 | Upper Stem | 316 L/A4 79 |
| 12 | Packing Bolt | 316 L/A4 79 |
| 13 | Lock Nut | 316 L/A4 79 |
| 14 | Handle | Anodized aluminium |
| 15 | Set Screw | 304 |

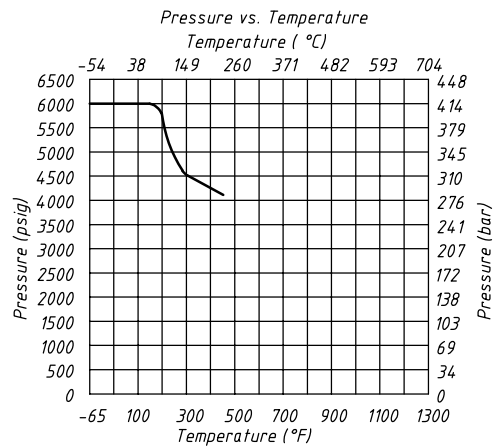

NOTE:Dimensions for reference only.

| | | | | | |
|-------------------------|------|---------------|---|--|-----|
| Linear unit of size: mm | | Needle Valves | | НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС | |
| signature | date | | | | |
| design | | versions | 1 | proportion | 1:1 |
| audit | | | | Page 1/1 | |
| ratify | | | | | |
| VN8-2B-D-10M-N-S | | | | | |