
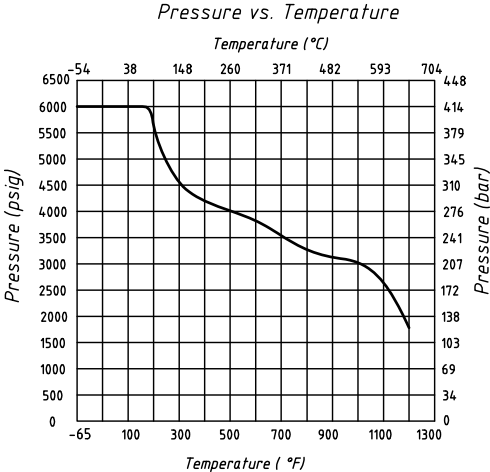


Valve Features	
Maximum working pressure	6000 psig
Working temperature	-54℃~649℃
Orifice	6.4mm
Cv	0.86

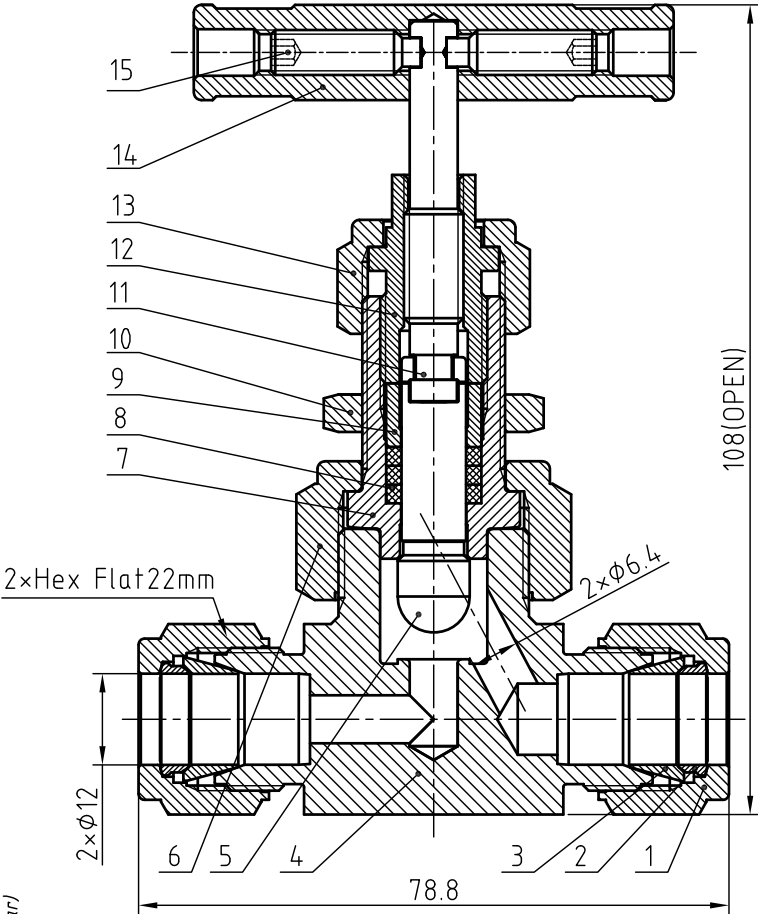

NOTE:Dimensions for reference only.

item	Component	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	Body	316 L/A4 79
5	Lower Stem	316 L/A4 79
6	Union Nut	316 L/A4 79
7	Bonnet	316 L/A4 79
8	Packing	Graphite
9	Gland	316 L/A4 79
10	Panel Nut	316 L/A4 79
11	Upper Stem	316 L/A4 79
12	Packing Bolt	316 L/A4 79
13	Lock Nut	316 L/A4 79
14	Handle	Anodized aluminium
15	Set Screw	Stainless steel

Linear unit of size: mm			Needle Valves				НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design			versions	1	proportion	1:1	VN8-2B-D-12M-GF-B-N-S	
audit			 		Page 1/1			
ratify								