| Valve Features | |
|---|---|
| Maximum working pressure | 6000psig |
| Working temperature | -54℃~649℃ |
| Orifice | 10mm |
| CV | 1.8 |

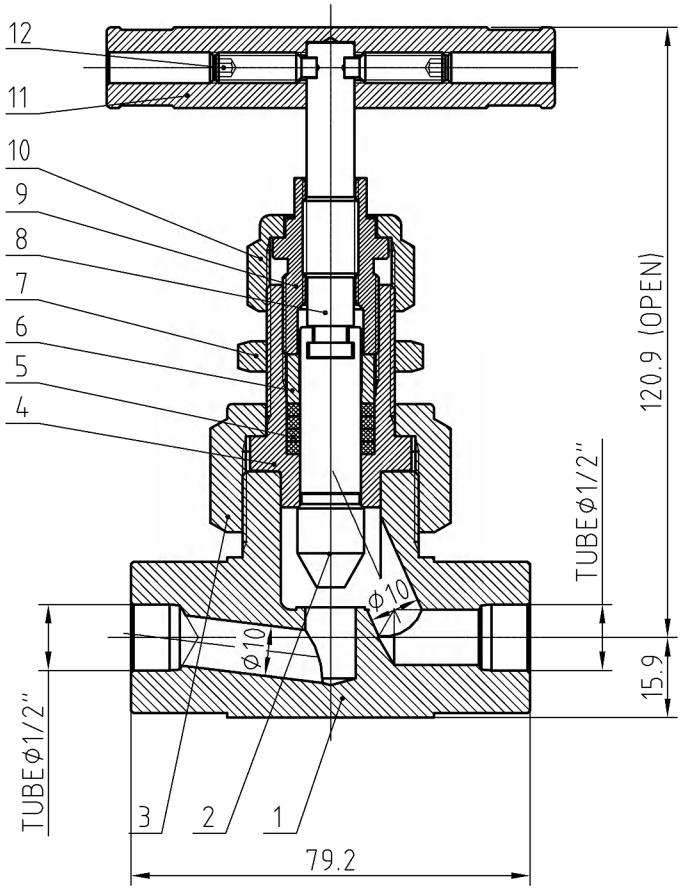


| IDX | Designation | Materials |
|---|---|---|
| 1 | Body | 316 L/A479 |
| 2 | Lower Stem | 316 L/A479 |
| 3 | Union Nut | 316 L/A479 |
| 4 | Bonnet | 316 L/A479 |
| 5 | Packing | Graphite |
| 6 | Gland | 316 L/A479 |
| 7 | Pannel Nut | Stainless steel |
| 8 | Upper Stem | 316 L/A479 |
| 9 | Packing Bolt | 316 L/A479 |
| 10 | Lock Nut | 316 L/A479 |
| 11 | Handle | Alumina Oxide |
| 12 | Set Screw | Stainless steel |

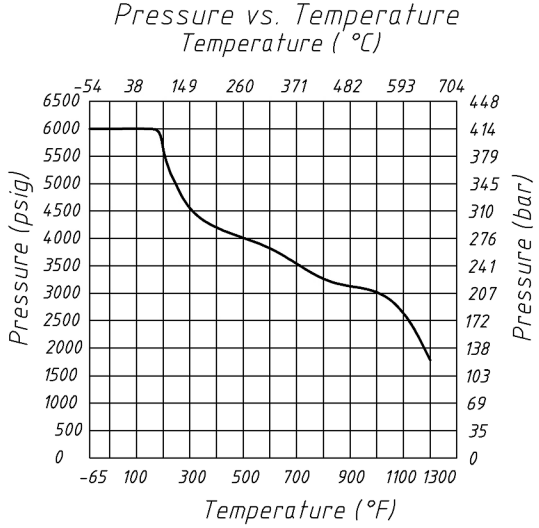


NOTE:Dimensions for reference only.

| Linear unit of size: mm | | | Needle Valve | | | | НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС |
|---|---|---|---|---|---|---|---|
| | signature | date | | | | | |
| design | | | versions | 1 | proportion | 1:1.5 | VN8-2C-SW-8T-GF-N-S |
| audit | | | | | | | |
| ratify | | | | | Page 1/1 | | |