
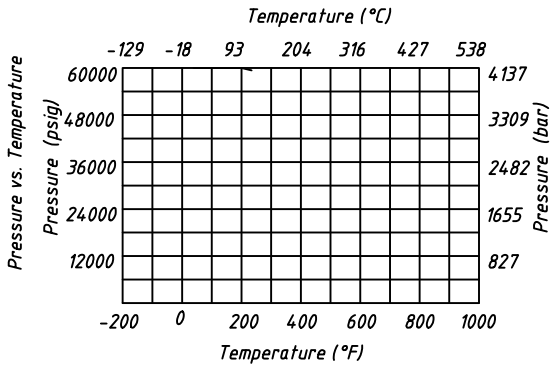


Valve Features	
Maximum working pressure	60000psig(4137bar)
Working temperature	40~230°F(4.4~110℃)
Orifice	0.063in.(1.59mm)
Cv	0.09

Item	Component	Material
1	Handle	Stainless Steel
2	Gasket	Stainless Steel
3	Set Screw	Stainless Steel
4	Upper Stem	316/ASTM A479
5	Packing Gland	C63000/B150
6	Locking Screw	Stainless Steel
7	Locking Plate	304/ASTM A240
8	Support Ring	304/ASTM A276
9	Packing Ring	C63000/B150
10	Packing	Nylon
11	Packing Washer	17-4PH/A564
12	Lower Stem	17-4PH/A564
13	Collar	316/ASTM A479
14	Gland	316/ASTM A479
15	Body	316/ASTM A479

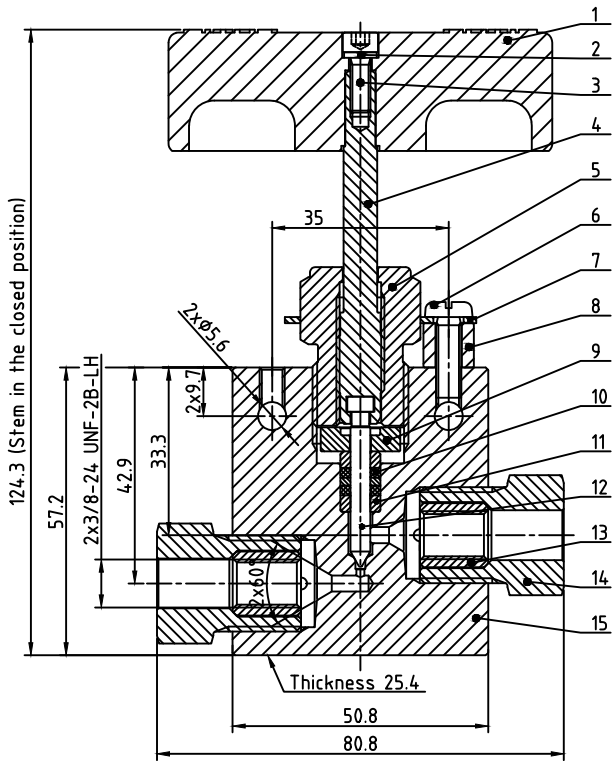

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valves			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1.5
audit						HVN60-2-F6HP-S
ratify						
			Page 1/1			