



Valve Features	
Maximum working pressure	2500psig (172bar)
Working temperature	-54℃~148℃
Orifice	0.19in. (4.8mm)
cv	0.75

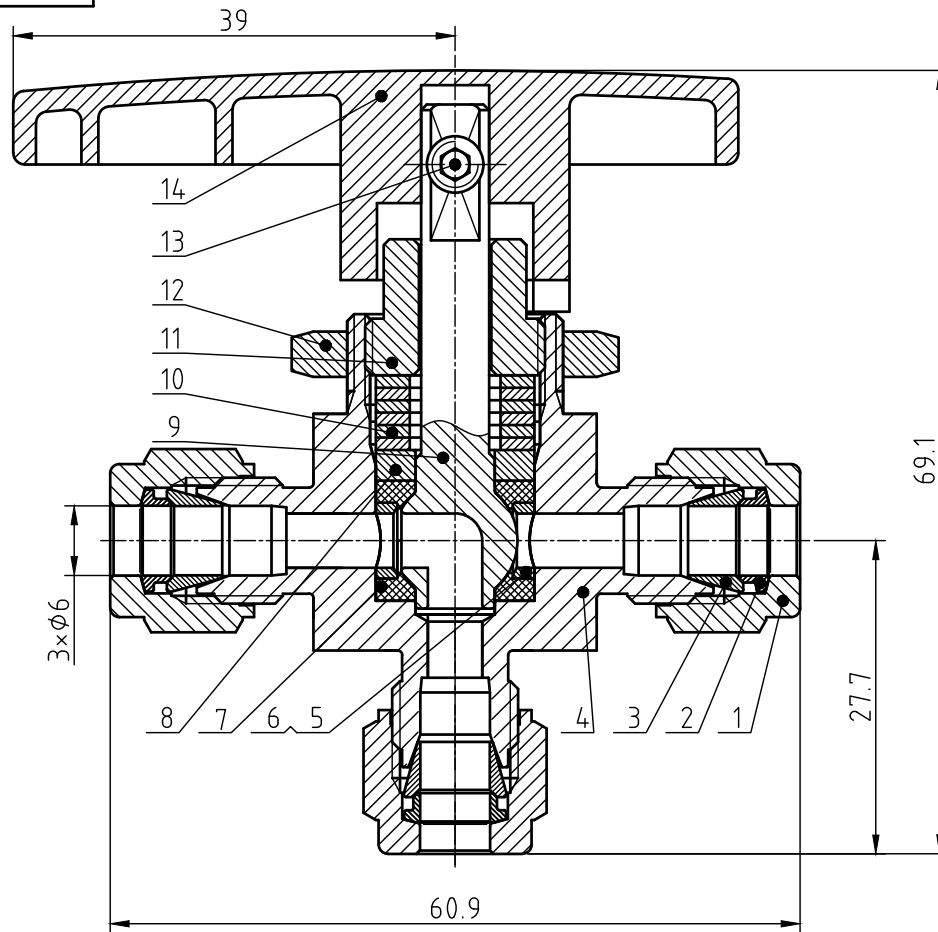

Item	Component	Material
1	Nut Hex	316L / ASTM A4 79
2	Rear Ferrules	316L / ASTM A4 79
3	Front Ferrules	316L / ASTM A4 79
4	Body	316L / ASTM A4 79
5	Support Ring	316L / ASTM A4 79
6	Support Disc	316L / ASTM A4 79
7	Packing Seat	PFA/D3307
8	Ball Stem	316L / ASTM A4 79
9	Gland	316L / ASTM A4 79
10	Disc Spring	S17700
11	Packing Bolt	316L / ASTM A4 79
12	Panel Nut	316L / ASTM A4 79
13	Set Screw	Carbon Steel
14	Handle	316L / ASTM A4 79

Pressure vs. Temperature

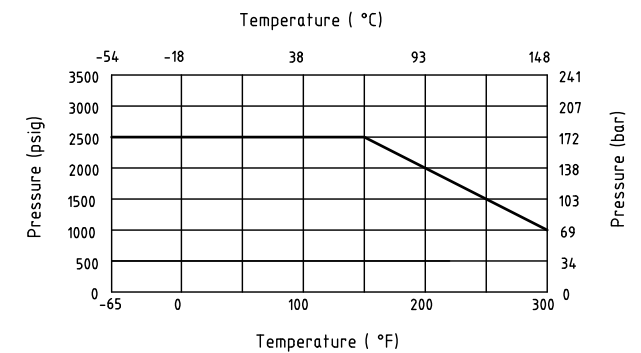

NOTE:Dimensions for reference only.

Linear unit of size: mm			Ball valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1.5:1
audit						BVN1-2B-3B-D-6M-PF-S
ratify						
			Page 1/1			