
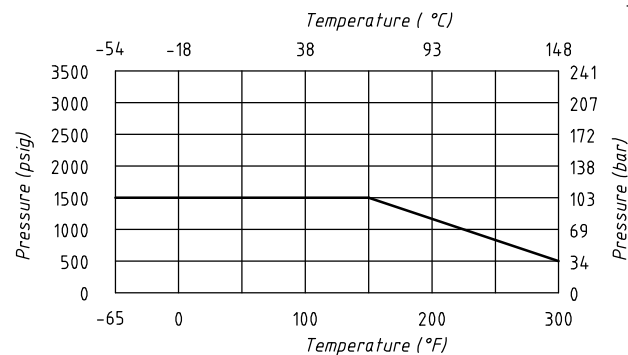
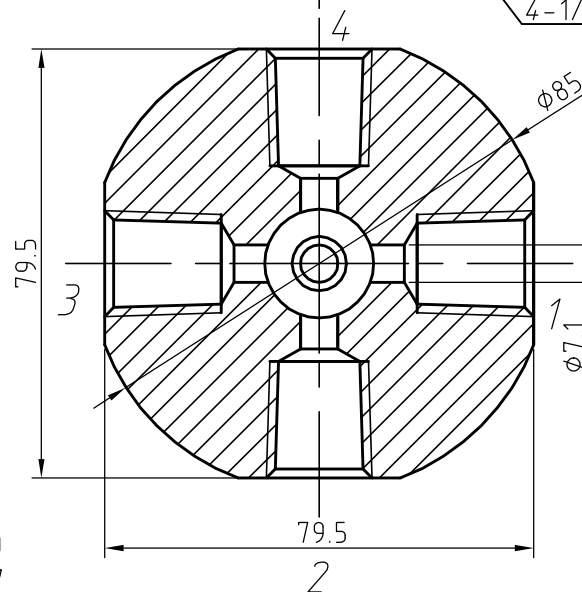
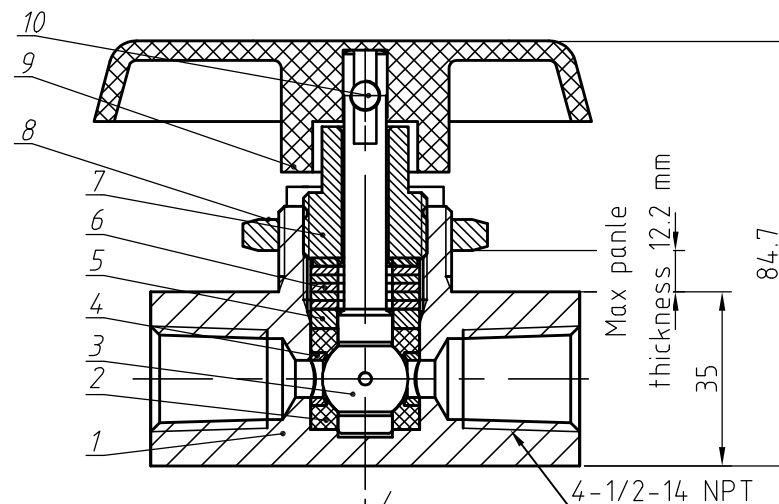



Valve Features	
Maximum working pressure	1500psig
Working temperature	-54°C~148°C
Orifice	0.28in.(7.1mm)
Cv	1.60

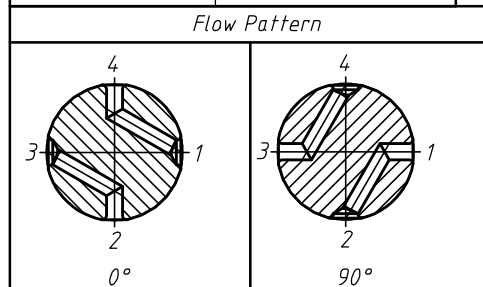

NOTE:Dimensions for reference only.

NPT Thread Standard:ASME B1.20.1,SAE AS71051.

Item	Component	Materials
1	Body	316L/A4 79
2	Packing Seat	PFA
3	Ball Stem	316L/A4 79
4	Support Ring	316L/A4 79
5	Gland	316L/A4 79
6	Disc Spring	S17700/A693
7	Packing Bolt	316L/A4 79
8	Panle Nut	316L/A4 79
9	Set Screw	stainless steel
10	Handle	Nylon

Linear unit of size: mm			Ball Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date					
design			versions	1	proportion	1:1	BVN1-2B-4X-F-8N-PF-S
audit	✓	11.09.2025					
ratify						Page 1/1	