



Valve Features	
Maximum working pressure	2500psig
Working temperature	-20~450°F(-28℃~232℃)
Orifice	0.52in.(13.1mm)
CV	12

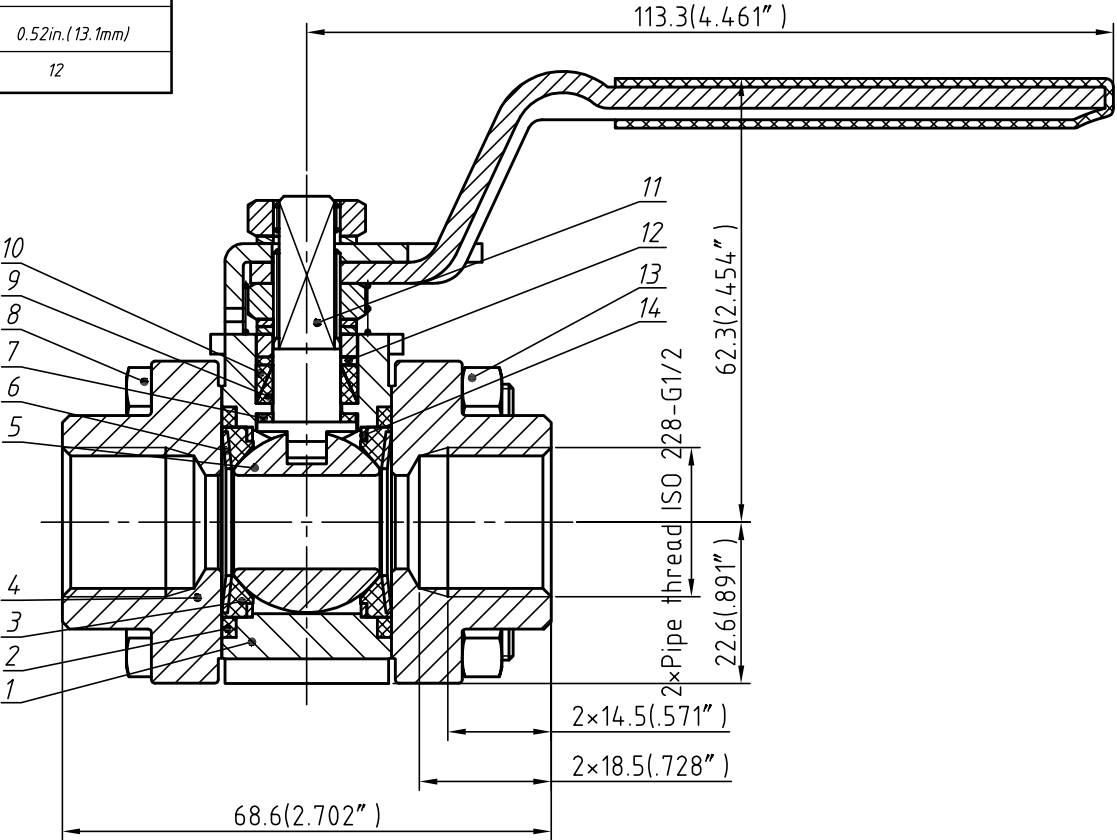

Item	Component	Material
1	Body	CF8M/A351
2	Flange Seal	PTFE/D1710
3	Seat	RPTFE
4	End Connection	CF8M/A351
5	Ball	316SS/A479
6	Coned-disc Spring	Strain-hardened 316 SS/A240
7	Stem Bearing	PEEK
8	Body Bolt	Gr. B8M/A193
9	Lower Packing	Reinforced PTFE
10	Upper Packing	Reinforced PTFE
11	Stem	316SS/A479
12	Packing Support	PEEK
13	Body Nut	Gr. 8M/A194
14	Support Ring	316 SS/A240

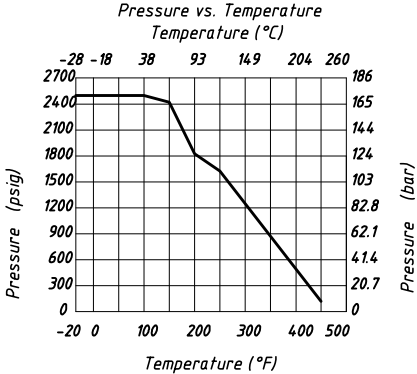

NOTE: Dimensions for reference only.

Linear unit of size: mm			Ball valve		НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date			
design			versions	1	proportion 1:1
audit					BVN3-2B-F-8GR-RP-316
ratify					
			Page 1/1		