
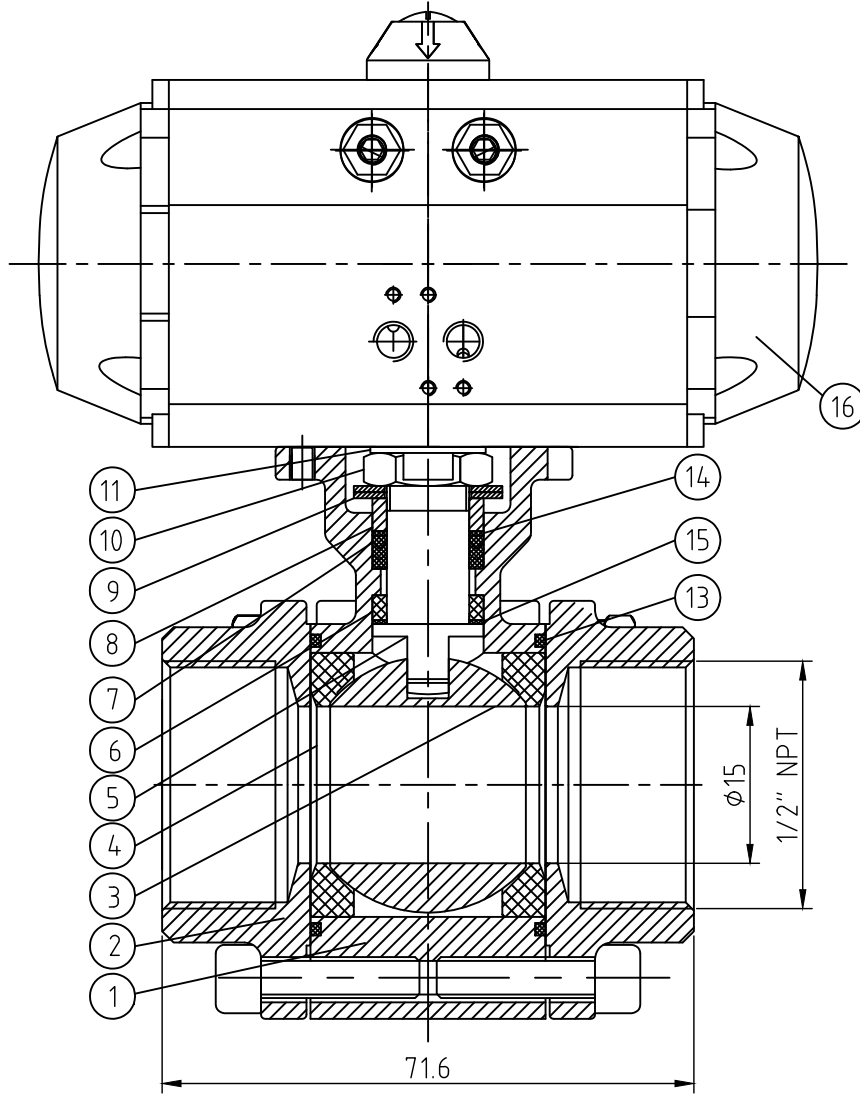


| Valve Features           |           |
|--------------------------|-----------|
| Maximum working pressure | 2000 psig |
| Working temperature      | -20℃~100℃ |



| Item | Component           | Material              |
|------|---------------------|-----------------------|
| 1    | BODY                | CF8M                  |
| 2    | CAP                 | CF8M                  |
| 3    | BALL                | CF8M                  |
| 4    | SEAT                | PTFE                  |
| 5    | STEM                | SUS316                |
| 6    | THRUST WASHER       | TFM4215               |
| 7    | STEM PACKING        | PTFE                  |
| 8    | GLAND               | SUS304                |
| 9    | SPRING WASHER       | SUS301                |
| 10   | STEM NUT            | SUS304                |
| 11   | STOP WASHER         | SUS304                |
| 12   | BOLT                | SUS304                |
| 13   | GASKET              | PTFE                  |
| 14   | BUSHING             | 50%S.S POWDER/50%PTFE |
| 15   | LOWER THRUST WASHER | 50%S.S POWDER/50%PTFE |
| 16   | CYLINDER            | ALUMINUM              |

|                         |           |      |            |   |            |                   |
|-------------------------|-----------|------|------------|---|------------|-------------------|
| Linear unit of size: mm |           |      | Ball valve |   |            | BVN3-2B-F-8N-NC-S |
|                         | signature | date |            |   |            |                   |
| design                  |           |      | versions   | 1 | proportion | 1:1               |
| audit                   |           |      |            |   |            | Page 1/1          |
| ratify                  |           |      |            |   |            |                   |

NOTE:Dimensions for reference only.