



Valve Features	
Maximum working pressure	10000psig
Working temperature	-40℃~232℃
Orifice	10mm
CV	7.5

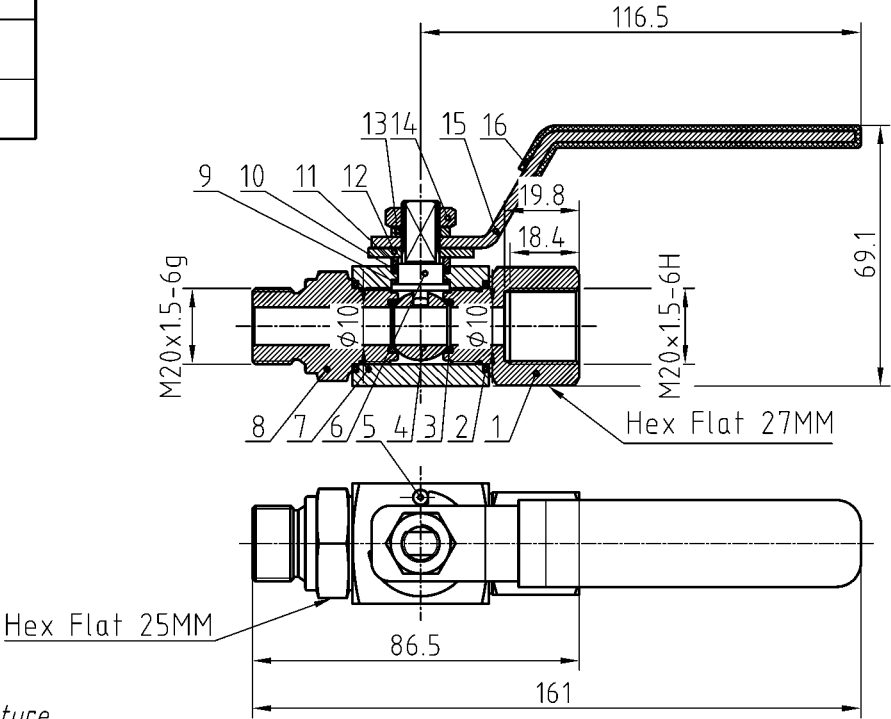


Pressure vs. Temperature

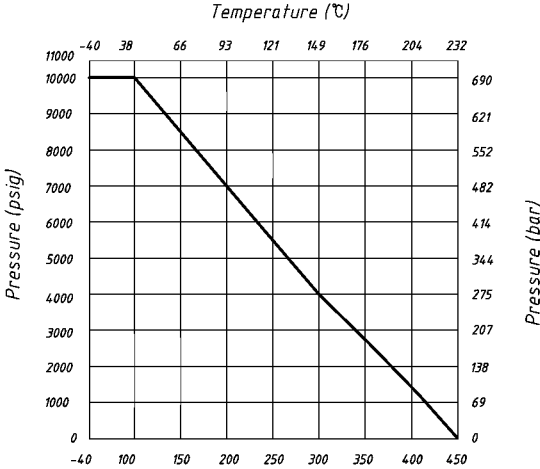

NOTE:

1. Dimensions for reference only;
2. Thread standard: ISO 261-1998.

IDX	Designation	Material
1	End Connection	316L / A4 79-NACE
2	O-ring	FKM
3	Seat	PEEK
4	Ball	316L / A4 79-NACE
5	Stop Pin	304
6	Stem	316L / A4 79-NACE
7	Body	316L / A4 79-NACE
8	End Connection	316L / A4 79-NACE
9	Lower Packing	PEEK
10	Stem Packing	PTFE
11	Stem Washer	316L / A4 79
12	Stop Block	304 / A240
13	Spring Washer	Stainless steel
14	Stem Nut	Stainless steel
15	Handle	304 / A240
16	Cover	PVC

Linear unit of size: mm			Ball Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date					
design			versions	1	proportion	1:2	BVN4-2A-MF-20M15-PK-S
audit							
ratify							
Page 1/1							