
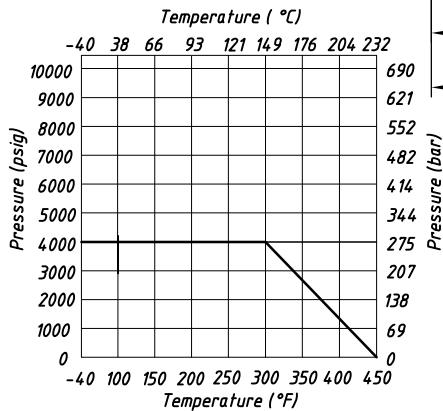


| Valve Features           |                  |
|--------------------------|------------------|
| Maximum working pressure | 4000psig(275bar) |
| Working temperature      | -40℃~232℃        |
| Orifice                  | 0.71in.(18mm)    |
| Cv                       | 30.0             |

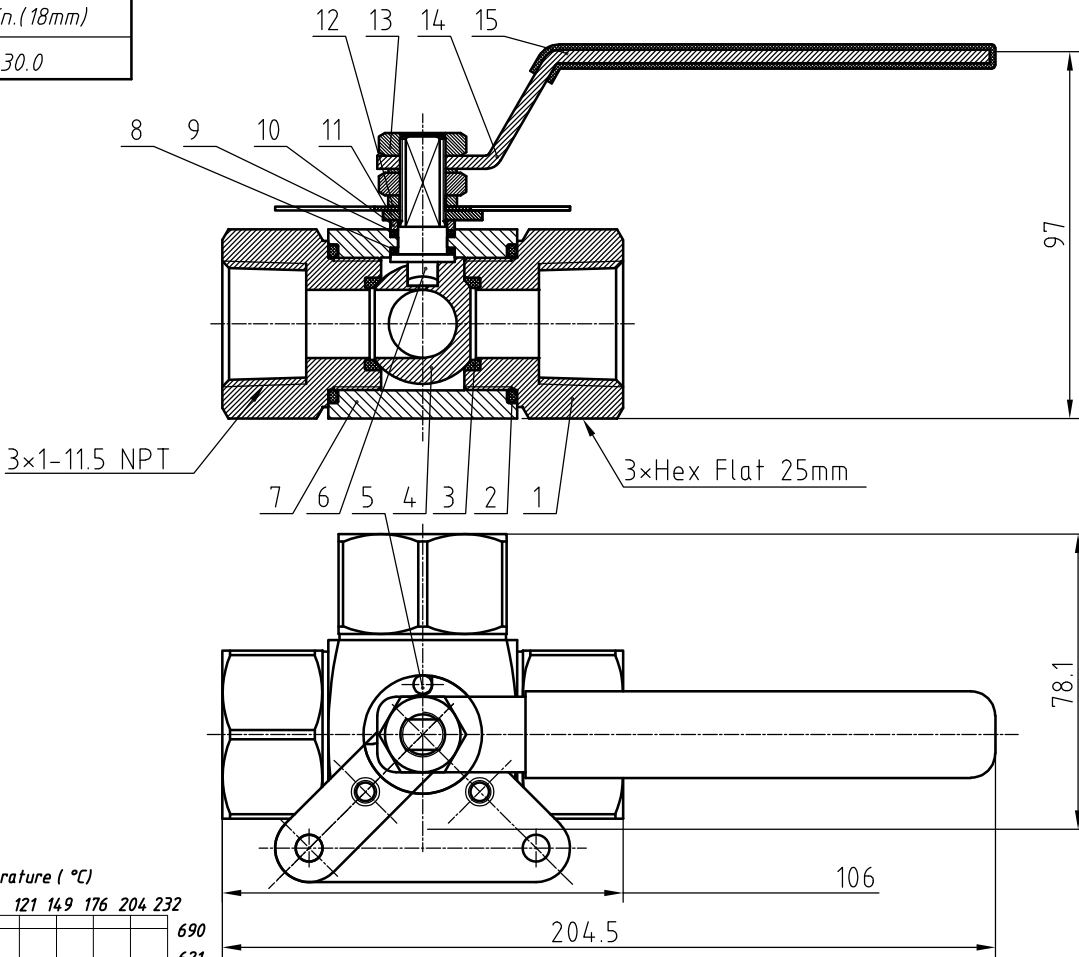

NOTE:Dimensions for reference only.

| Item | Component      | Materials        |
|------|----------------|------------------|
| 1    | End Connention | 316 L/A479       |
| 2    | O-ring         | Fluorocarbon FKM |
| 3    | Seat           | PEEK             |
| 4    | Ball           | 316 L/A479       |
| 5    | Stop Pin       | 316              |
| 6    | Stem           | 316 L/A479       |
| 7    | Body           | 316 L/A479       |
| 8    | Lower Packing  | PEEK             |
| 9    | Stem Packing   | PTFE/D1710       |
| 10   | Stem Washer    | 316 L/A479       |
| 11   | Stop Block     | 304 SS/A240      |
| 12   | Spring Washer  | 316              |
| 13   | Stem Nut       | 316 L/A479       |
| 14   | Handle         | 304              |
| 15   | Vinyl Cover    | PVC              |

|                         |           |      |                                                                                                                                                                             |   |            |     |                                       |  |
|-------------------------|-----------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------|-----|---------------------------------------|--|
| Linear unit of size: mm |           |      | Ball Valve                                                                                                                                                                  |   |            |     | НТА-ПРОМ<br>ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС |  |
|                         | signature | date |                                                                                                                                                                             |   |            |     |                                       |  |
| design                  |           |      | versions                                                                                                                                                                    | 1 | proportion | 1:2 | BVN4-2C-3S-F-16N-PK-LD-S              |  |
| audit                   |           |      |   |   | Page 1/1   |     |                                       |  |
| ratify                  |           |      |                                                                                                                                                                             |   |            |     |                                       |  |