
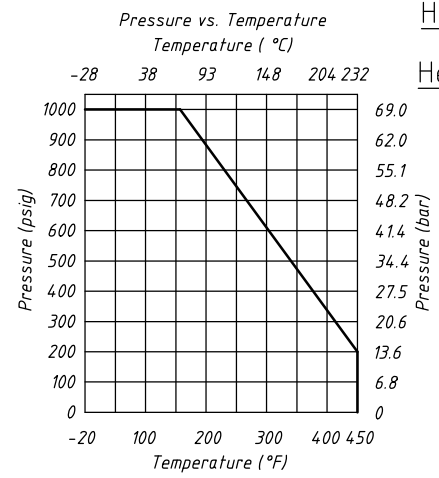
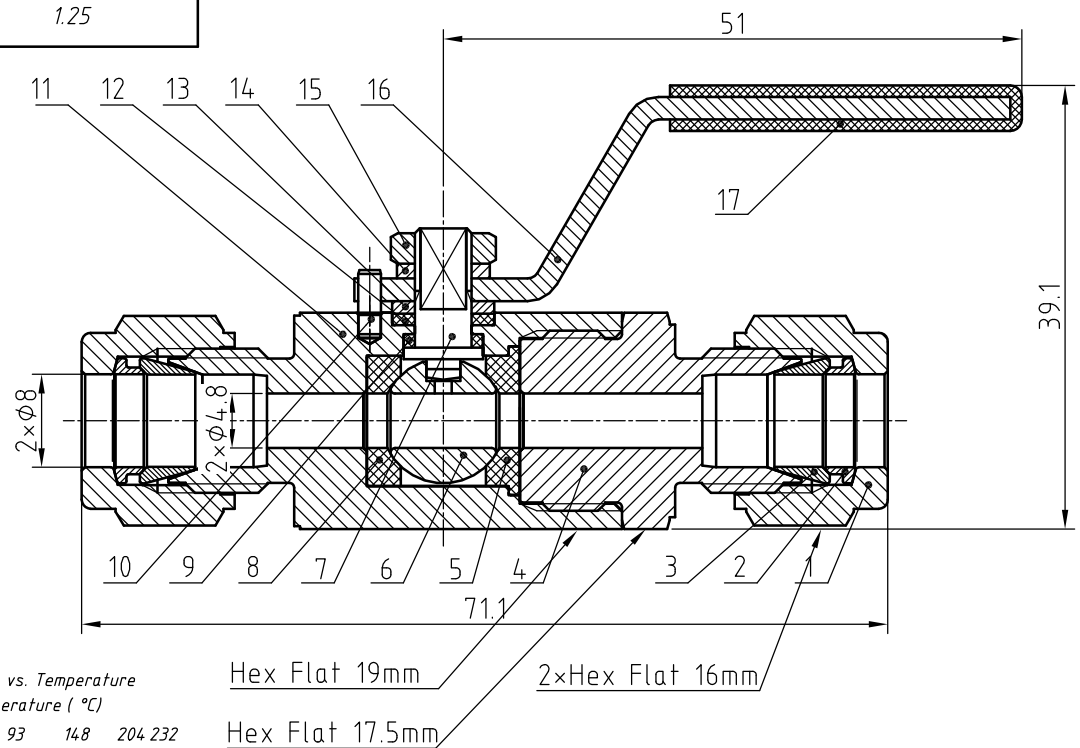


Valve Features	
Maximum working pressure	1000 psig (69bar)
Working temperature	-28°C~232°C
Orifice	0.19in.(4.8mm)
Cv	1.25



NOTE:Dimensions for reference only.

Item	Component	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	End Connection	316 L/A4 79
5	Back Seat	PTFE
6	Ball	316 L/A4 79
7	Stem	316 L/A4 79
8	Front Seat	PTFE
9	Lower Packing	PTFE
10	Stop Pin	304/A240
11	Body	316 L/A4 79
12	Upper Packing	PTFE
13	Washer	316 L/A4 79
14	Gasket	304/A240
15	Coned-disk Spring	304/A240
16	Handle	304/A240
17	Sleeve	PVC

Linear unit of size: mm			Ball Valve			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1.5:1
audit			 Page 1/1			BVN5-2A-D-8M-S
ratify						