


Valve Features	
Maximum working pressure	2000psig
Working temperature	-60℃~204℃
Orifice	7.1mm
cv	2.5

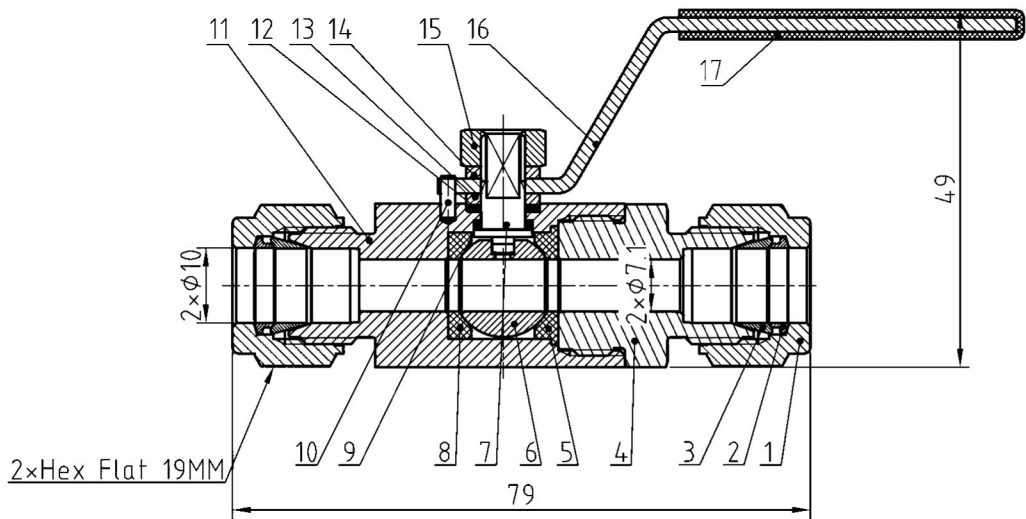

IDX	designation	materials
1	Nut	316L/A479
2	Rear Ferrules	316L/A479
3	Front Ferrules	316L/A479
4	End Connection	316L/A479
5	Rear valve seat	PFA
6	Ball	316L/A479
7	Stem	316L/A479
8	Front valve seat	PFA
9	Lower packing	RPTFE
10	Stop Pin	stainless steel
11	Body	316L/A479
12	upper packing	RPTFE
13	Washer	316L/A479
14	Gasket	316L/A479
15	Stem Nut	316L/A479
16	Valve handle	stainless steel
17	Handle sleeve	Vinyl

NOTE:Dimensions for reference only.
The color of the handle is RAL 3020

Linear unit of size: mm			Ball Valve				НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design			versions	1	proportion	1:1	BVN6-2B-D-10M-RP-RD-S	
audit					Page 1/1			
ratify								