
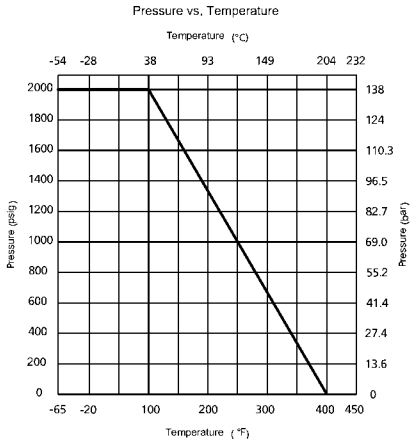


Valve Features	
Maximum working pressure	2000 psig (138bar)
Working temperature	-54 °C~204 °C
Orifice	0.35in.(8.9mm)
Cv	5.3

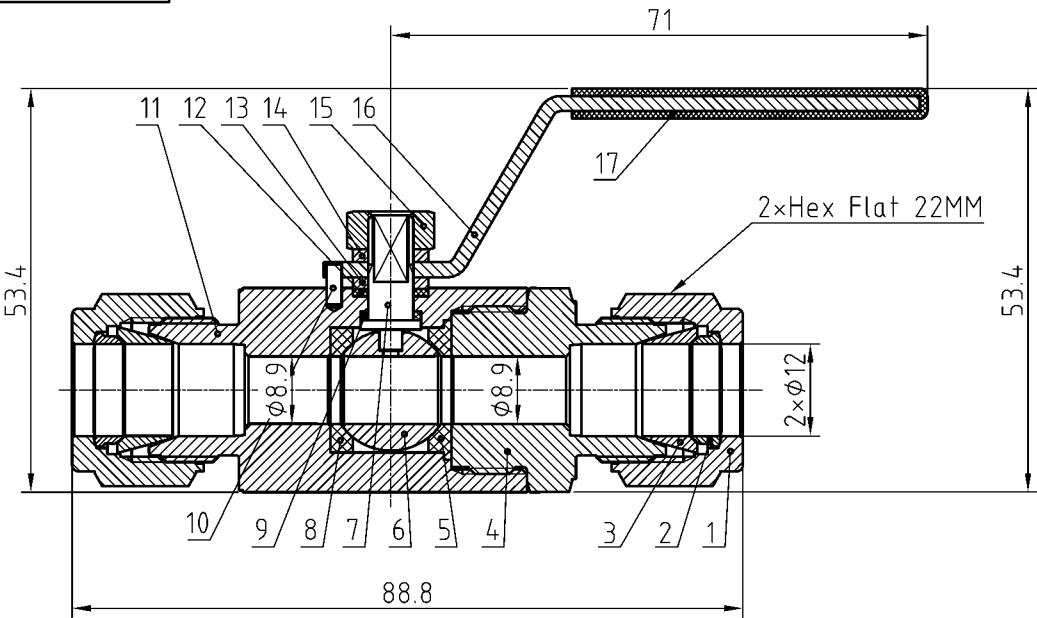

NOTE:Dimensions for reference only.

Item	Component	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	End Connection	316 L/A4 79
5	Back Seat	PFA
6	Ball	316 L/A4 79
7	Stem	316 L/A4 79
8	Front Seat	PFA
9	Lower Packing	PFA
10	Stop Pin	304/A240
11	Body	316 L/A4 79
12	Upper Packing	PFA
13	Washer	316 L/A4 79
14	Gasket	304/A240
15	Coned-disk Spring	304/A240
16	Handle	304/A240
17	Sleeve	PVC

Linear unit of size: mm			Ball Valve				HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design			versions	1	proportion	1:1	BVN6-2C-D-12M-S	
audit			 		Page 1/1			
ratify								