
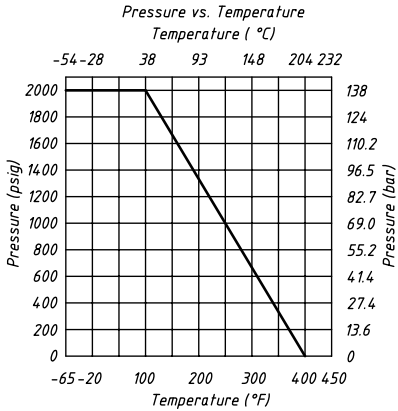


Valve Features	
Maximum working pressure	2000psig
Working temperature	-54℃~204℃
Orifice	0.35in.(8.9mm)
Cv	5.3

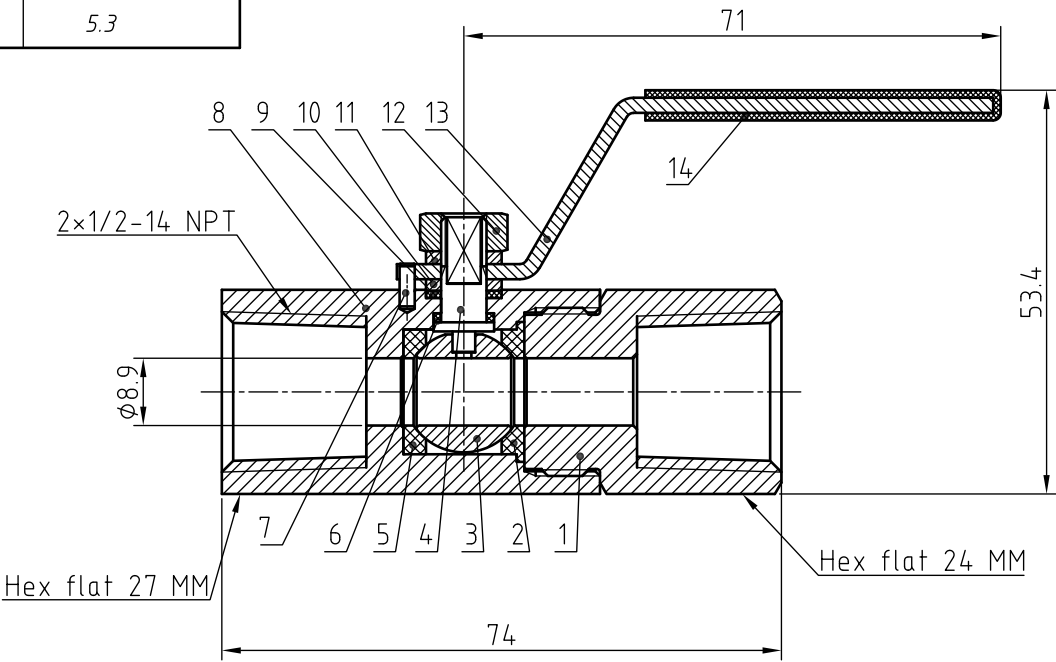

IDX	Designation	Materials
1	Ball valve connector	316L/A4 79
2	Rear valve seat	PFA
3	Valve Ball	316L/A4 79
4	Stem	316L/A4 79
5	Front Valve Seat	PFA
6	Lower Packing	PFA
7	Cylindrical Pin	Stainless Steel
8	Valve Body	316L/A4 79
9	Upper Packing	PFA
10	Packing Seat	316L/A4 79
11	Spring Cushion	Stainless Steel
12	Nut	Stainless Steel
13	Ball Valve Handel	304
14	Handle Sleeve	PVC

NOTE:Dimensions for reference only.

Linear unit of size: mm			Ball Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						BVN6-2C-F-8N-S
ratify						
						Page 1/1