


Valve Features	
Maximum working pressure	2000 psig (138bar)
Working temperature	-60°C~204°C
Orifice	0.47in.(12mm)
Cv	12.65

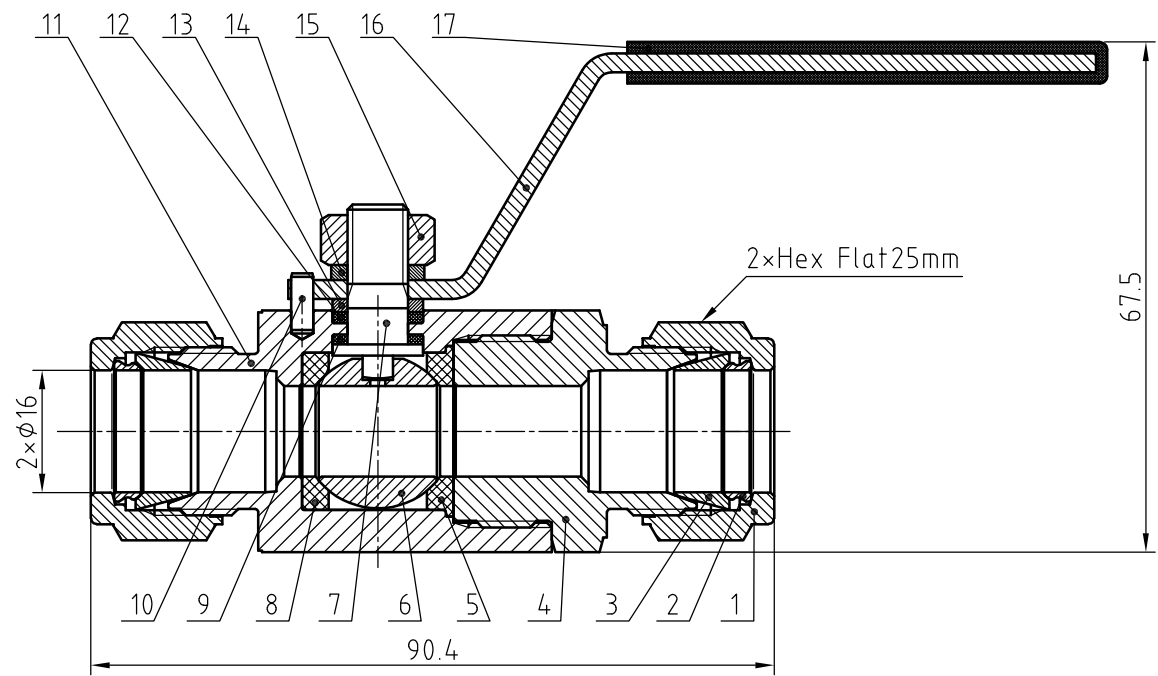

item	Component	Materials
1	Nut	316 SS/A479
2	Rear Ferrules	316 SS/A479
3	Front Ferrules	316 SS/A479
4	End Connection	316 SS/A479-NACE
5	Back Seat	PFA
6	Ball	316 SS/A479-NACE
7	Stem	316 SS/A479-NACE
8	Front Seat	PFA
9	Lower Packing	PTFE GF25
10	Stop Pin	304/A240
11	Body	316 SS/A479-NACE
12	Upper Packing	PTFE GF25
13	Washer	316 SS/A479
14	Gasket	304/A240
15	Coned-disk Spring	304/A240
16	Handle	304/A240
17	Cover	Vinyl

NOTE:Dimensions for reference only.

Linear unit of size: mm			Ball Valves			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						BVN6-2D-D-16M-RP-SG-S
ratify						
			Page 1/1			