
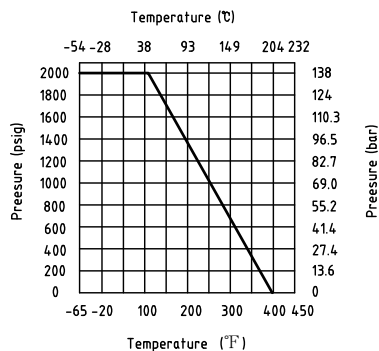


| Valve Features           |                    |
|--------------------------|--------------------|
| Maximum working pressure | 2000 psig (138bar) |
| Working temperature      | -54 °C~204 °C      |
| Orifice                  | 0.47n.(12mm)       |
| Cv                       | 8.60               |

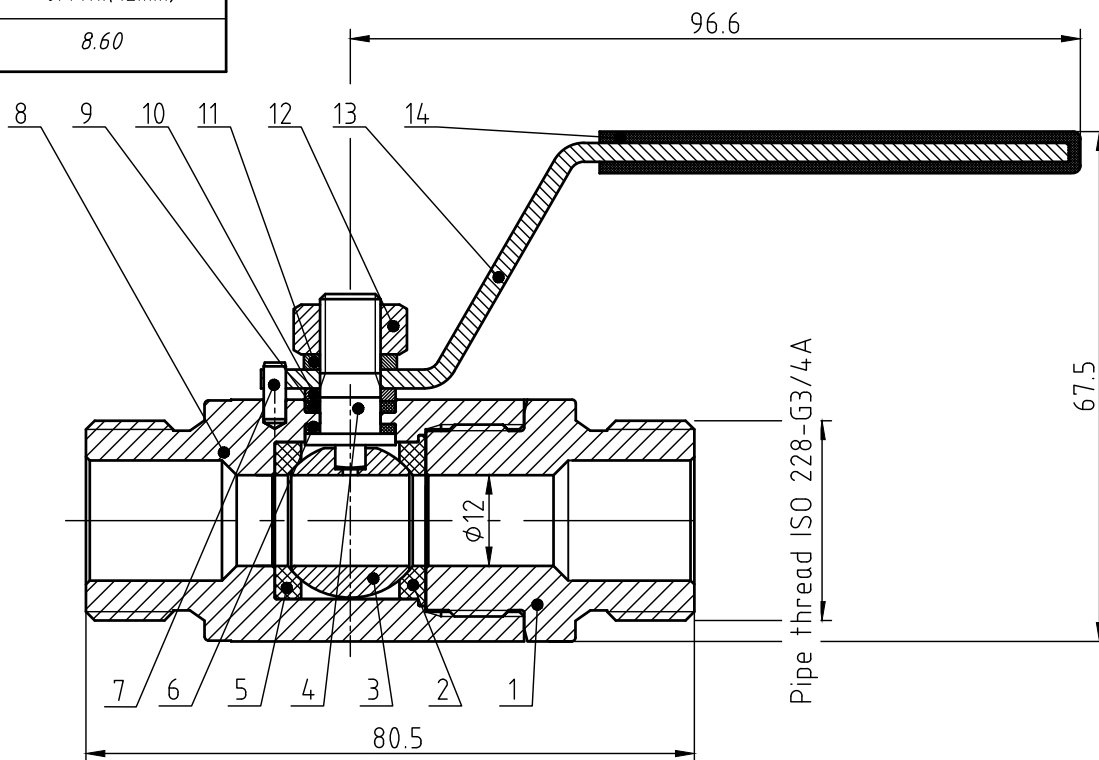

NOTE:Dimensions for reference only.

| item | Component         | Materials  |
|------|-------------------|------------|
| 1    | End Connection    | 316 L/A479 |
| 2    | Back Seat         | PFA        |
| 3    | Ball              | 316 L/A479 |
| 4    | Stem              | 316 L/A479 |
| 5    | Front Seat        | PFA        |
| 6    | Lower Packing     | PTFE GF25  |
| 7    | Stop Pin          | 304/A240   |
| 8    | Body              | 316 L/A479 |
| 9    | Upper Packing     | PTFE GF25  |
| 10   | Washer            | 316 L/A479 |
| 11   | Gasket            | 304/A240   |
| 12   | Coned-disk Spring | 304/A240   |
| 13   | Handle            | 304/A240   |
| 14   | Cover             | Vinyl      |

|                         |           |      |                                 |   |            |                                                          |
|-------------------------|-----------|------|---------------------------------|---|------------|----------------------------------------------------------|
| Linear unit of size: mm |           |      | Ball Valve                      |   |            | <div>НТА-ПРОМ</div> <div>ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС</div> |
|                         | signature | date |                                 |   |            |                                                          |
| design                  |           |      | versions                        | 1 | proportion | BVN6-2D-M-12G-RP-S                                       |
| audit                   |           |      | <div></div> <div>Page 1/1</div> |   |            |                                                          |
| ratify                  |           |      |                                 |   |            |                                                          |