
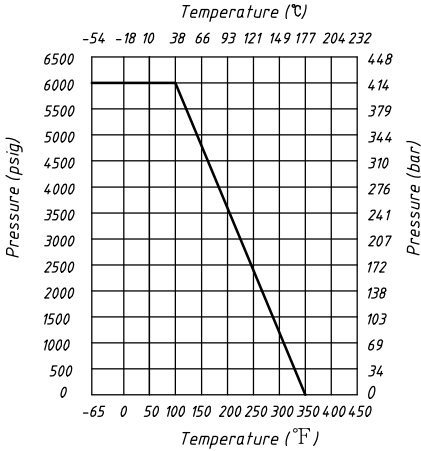


Valve Features	
Maximum working pressure	6000psig(414bar)
Working temperature	-54℃~177℃
Orifice	0.19in.(4.8mm)
CV	1.04

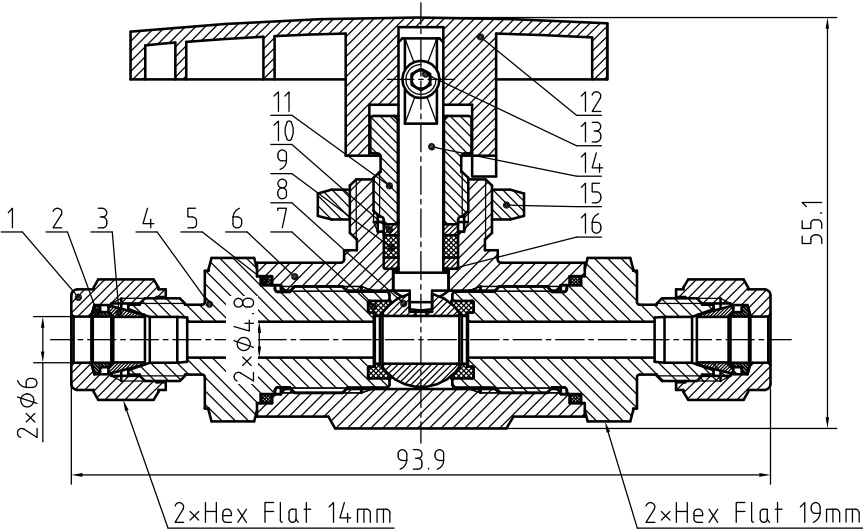

NOTE:Dimensions for reference only.

IDX	Designation	Materials
1	Nut	316L/A4 79
2	Rear Ferrules	316L/A4 79
3	Front Ferrules	316L/A4 79
4	End Connection	316L/A4 79
5	Connection O-ring	PTFE
6	Body	316L/A4 79
7	Seat	PCTFE
8	Ball	316L/A4 79
9	Stem Packing	PTFE
10	Stem Washer	316L/A4 79
11	Packing Nut	316L/A4 79
12	Handle	Nylon
13	Set Screw	304
14	Stem	316L/A4 79
15	Panel Nut	316L/A4 79
16	Stem Back-up Ring	PEEK

Linear unit of size: mm			Ball Valve				НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design			versions	1	proportion	1:1	BVN9-2B-D-6M-PC-S	
audit			  Page 1/1					
ratify								