



Valve Features	
Maximum working pressure	6000psig (414bar)
Working temperature	-54℃~232℃
Orifice	0.19in. (4.8mm)
Cv	1.04

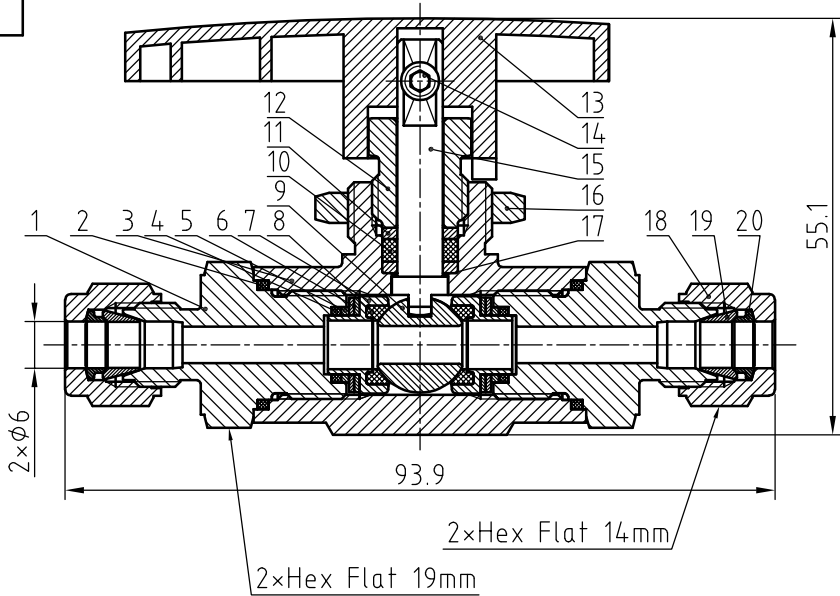

Item	Component	Material
1	End Connection	316 L/A479
2	Connection O-ring	PTFE
3	Body	316 L/A182
4	Seat Retainer Backup Ring	PTFE
5	Seat Retainer Guide	316 L/A479
6	Seat Spring	Alloy X-750
7	Seat Retainer	316 L/A479
8	Seat	PEEK
9	Ball	316 L/A479
10	Stem Packing	PTFE
11	Stem Washer	316 L/A479
12	Packing Nut	316 L/A479
13	Handle	Carbon steel
14	Set Screw	316 L/A479
15	Stem	316 L/A479
16	Panel Nut	316 L/A479
17	Stem Back-up Ring	PEEK
18	Nut	316 L/A479
19	Front Ferrule	316 L/A479
20	Rear Ferrule	316 L/A479

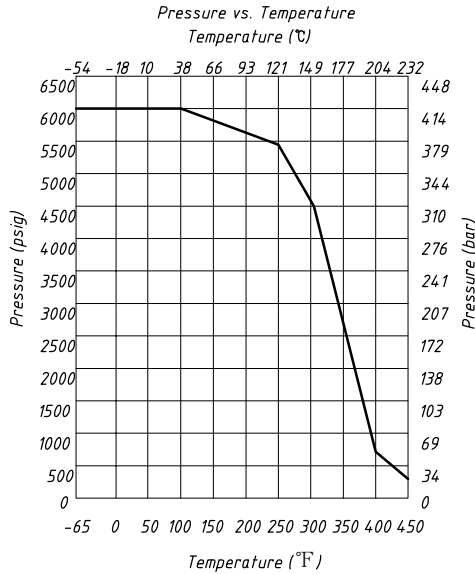

NOTE:Dimensions for reference only.

Linear unit of size: mm			Ball valves HTA-Пром		
	signature	date			
design			versions	1	proportion 1:1
audit			Page 1/1		
ratify					
			BVN9-2B-D-6M-PK-S		