



Valve Features	
Maximum working pressure	6000psig
Working temperature	-54℃~232℃
Orifice	0.25in.(6.4mm)
CV	2.34

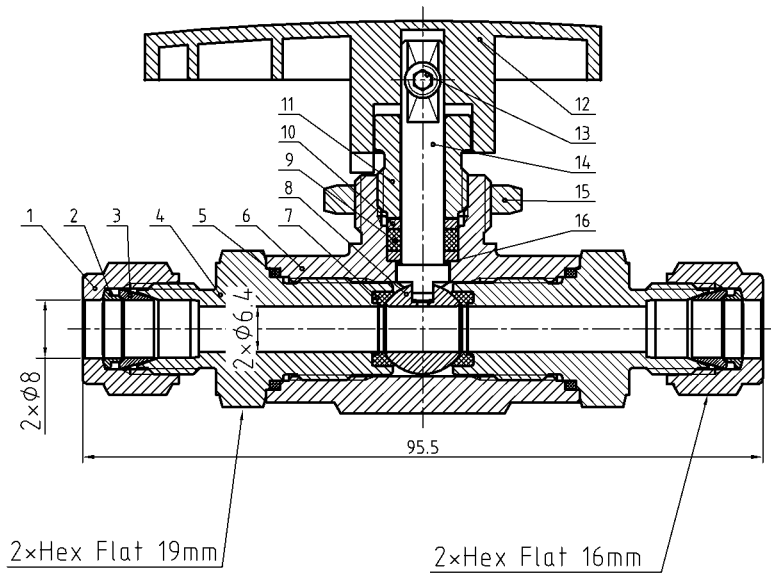

Item	Component	Material
1	Nut	316 L/A4 79
2	Rear Ferrule	316 L/A4 79
3	Front Ferrule	316 L/A4 79
4	End Connection	316 L/A4 79
5	Connection O-ring	PTFE
6	Body	316 L/A4 79
7	Seat	PEEK
8	Ball	316 L/A4 79
9	Stem Packing	PTFE
10	Stem Washer	316 L/A4 79
11	Packing Nut	316 L/A4 79
12	Handle	Carbon steel
13	Set Screw	316 L/A4 79
14	Stem	316 L/A4 79
15	Panel Nut	316 L/A4 79
16	Stem Back-up Ring	PEEK

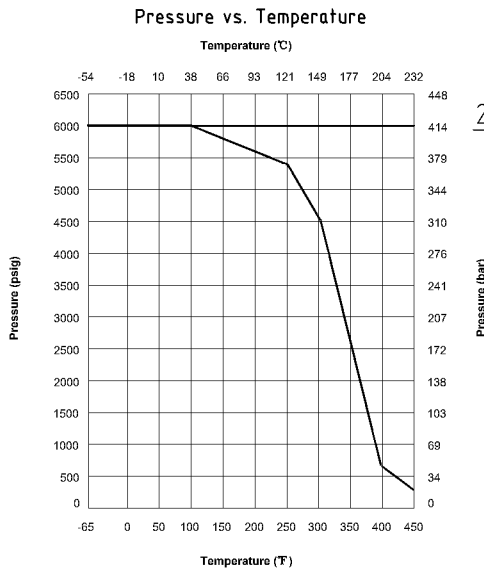

NOTE:Dimensions for reference only.

Linear unit of size: mm			Ball Valve		HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date			
design			versions	1	proportion 1:1
audit					BVN9-2B-D-8M-PK-S Page 1/1
ratify					