
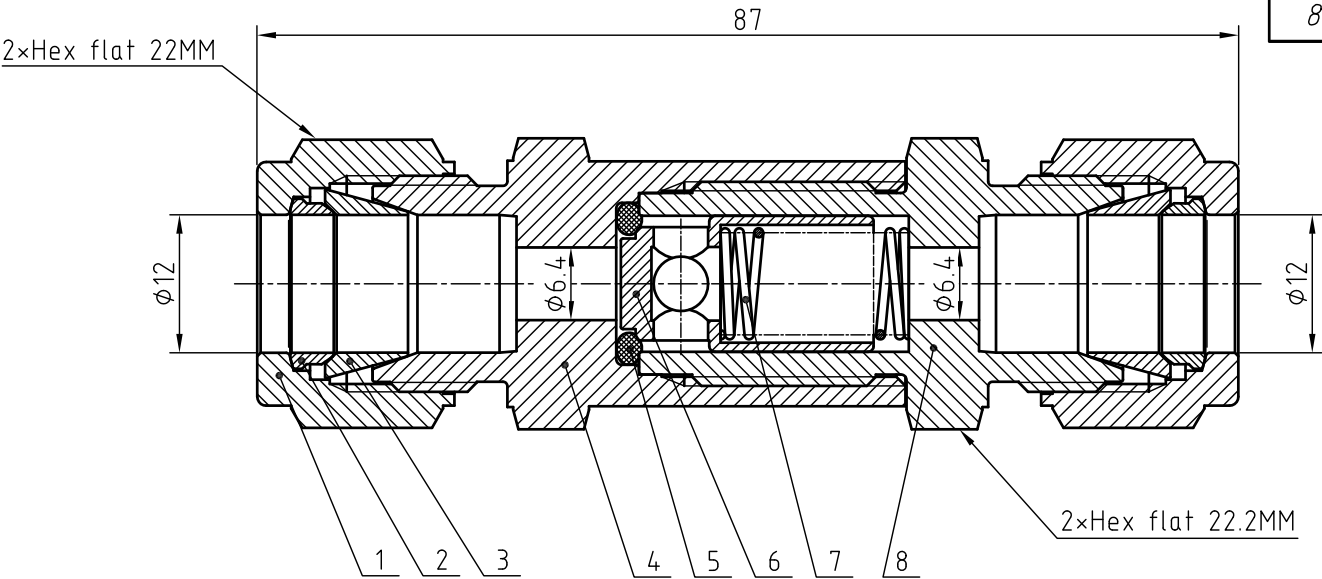


Valve Features	
Maximum working pressure	3000 psig (207bar)
Working temperature	-23°C~190°C
Orifice	0.25in.(6.4mm)
Cv	1.68
Cracking pressure	1/3psig

IDX	Designation	Material
1	Nut	316SS or 321SS
2	Rear Ferrules	316SS or 321SS
3	Front Ferrules	316SS or 321SS
4	Inlet Body	321SS/A4 79
5	O-ring	FKM
6	Poppet	316SS/A4 79
7	Spring	302/A313
8	Outlet Body	321S/A4 79



NOTE:Dimensions for reference only.

Linear unit of size: mm			Check Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1.5:1
audit						CVN1-2C-D-12M-1/3-321
ratify						
			Page 1/1			