
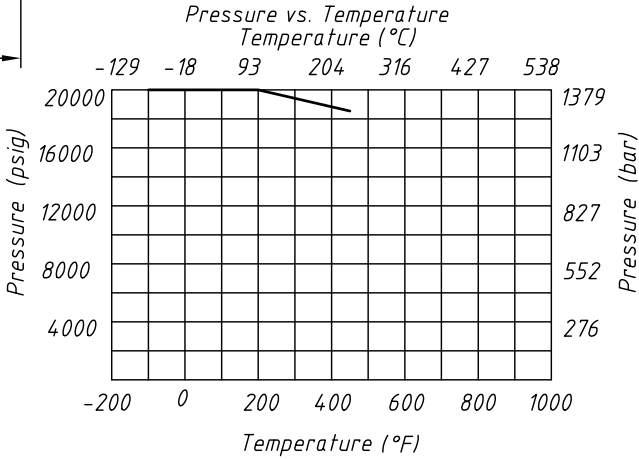


Valve Features	
Maximum working pressure	20000psig(1379bar)
Working temperature	-100~450°F(-73~232℃)
Orifice	0.312in.(7.92mm)
Cv	1.30

Item	Component	Material
1	Handle	Stainless Steel
2	Set Screw	Stainless Steel
3	Upper Stem	316/ASTM A479
4	Packing Gland	C63000/B150
5	Locking Screw	Stainless Steel
6	Locking Plate	304/ASTM A240
7	Packing Ring	C63000/B150
8	Packing	PTFE/ASTM D1710
9	Packing Washer	17-4PH/A564
10	Lower Stem	17-4PH/A564
11	Body	316/ASTM A479

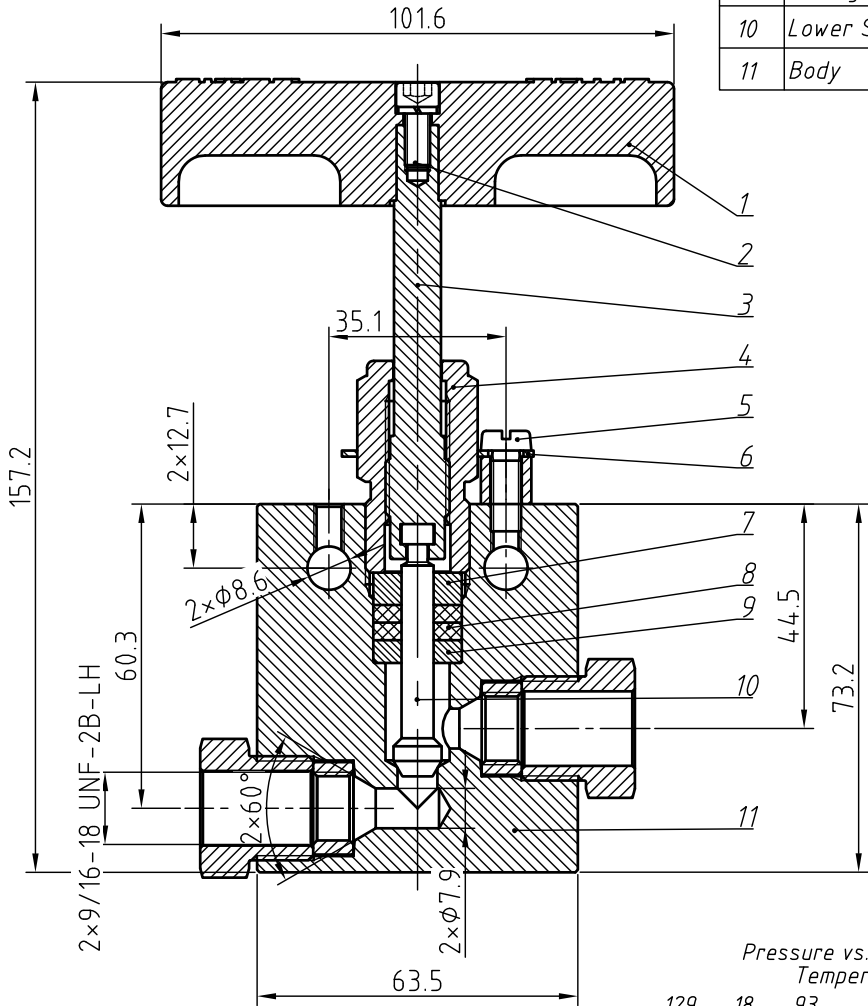

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
signature	date		versions	1	proportion	1:1.5	HVN20-2-F9MP-S
design							
audit							
ratify							
						Page 1/1	