
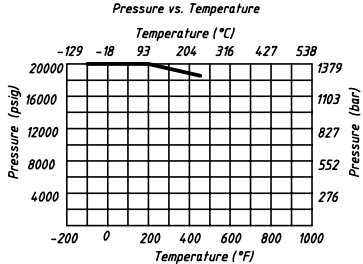

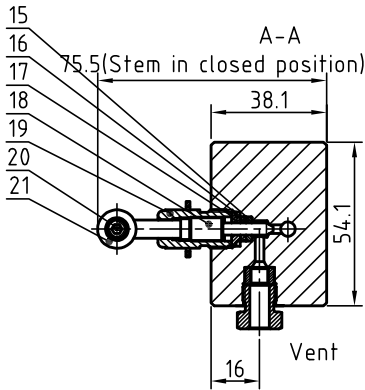
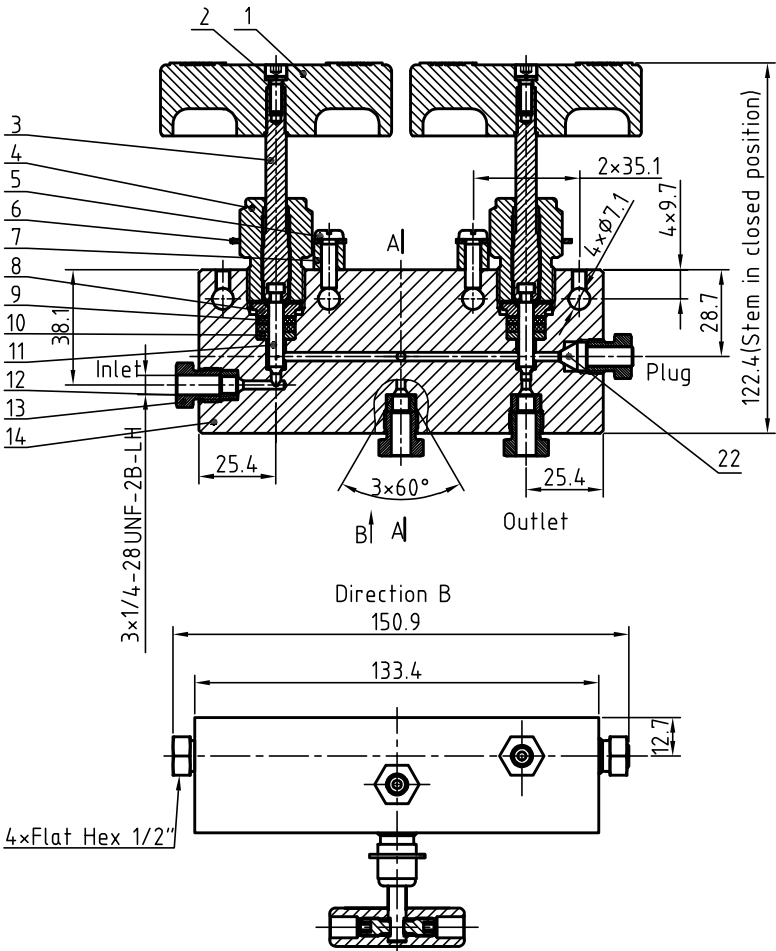


Valve Features	
Maximum working pressure	20000psig(1379bar)
Working temperature	-100~450°F(-73~232℃)
Orifice	0.094in.(2.4mm)
Cv	0.10



NOTE: Dimensions for reference only.

Item	Component	Material
1	Handle	Stainless Steel
2	Set Screw	Stainless Steel
3	Upper Stem	Alloy 718
4	Packing Gland	Copper
5	Locking Screw	Stainless Steel
6	Locking Plate	304
7	Support Ring	Stainless Steel
8	Packing Ring	Copper
9	Packing	PTFE
10	Packing Washer	630
11	Lower Stem	Alloy 718
12	Collar	316
13	Gland	316
14	Body	316
15	Packing Washer	630
16	Packing	PTFE
17	Packing Ring	Copper
18	Stem	Alloy 718
19	Packing Gland	Copper
20	Set Screw	Stainless Steel
21	Handle	Stainless Steel
22	Plug	316

Linear unit of size: mm			Double Block&Bleed Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:3
audit			 Page 1/1			HVN20DB-2-F4MP-VF4MP-S
ratify						