


Valve Features	
Maximum working pressure	1000 psig (69bar)
Working temperature	-23°C~204°C
Orifice	0.056in.(1.42mm)
Cv	0.03

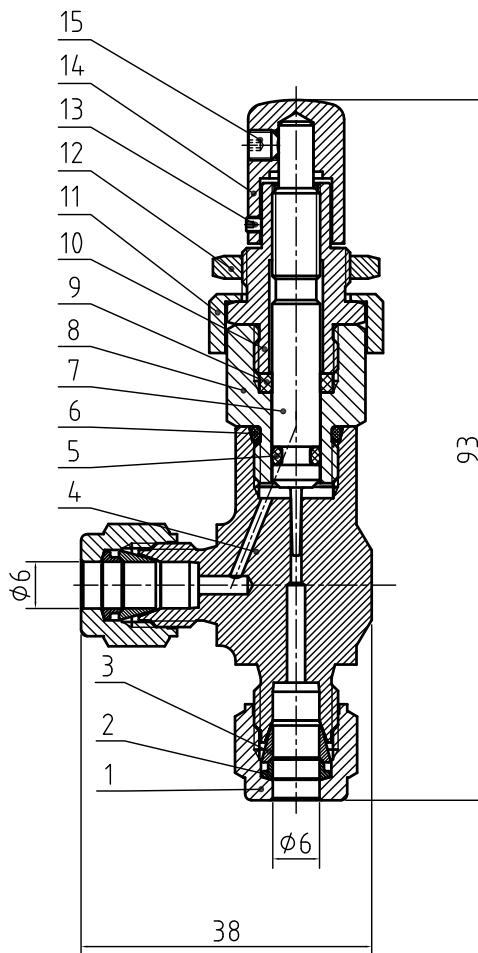

Item	Component	Material
1	Nut	316L/ASTM A479
2	Rear Ferrule	316L/ASTM A479
3	Front Ferrule	316L/ASTM A479
4	Body	316L/ASTM A182
5	O-ring	Fluorocarbon FKM
6	O-ring	Fluorocarbon FKM
7	Stem	316L/ASTM A479
8	Body Extension	316L/ASTM A479
9	Stem Guide Ring	PTFE
10	Bonnet	316L/ASTM A479
11	Bonnet Sleeve	Stainless steel
12	Panel Mount Nut	316L/ASTM A479
13	Lock Screw	Stainless steel
14	Handle	304/304L A479
15	Handle Screw	Stainless steel

NOTE: Dimensions for reference only.

Linear unit of size: mm		Metering Valve				HTA-ПРОМ	
	signature	date					ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
design			versions	1	proportion	1:1	MVN2-2-D-6M-A-S
audit							
ratify							
					Page 1/1		