
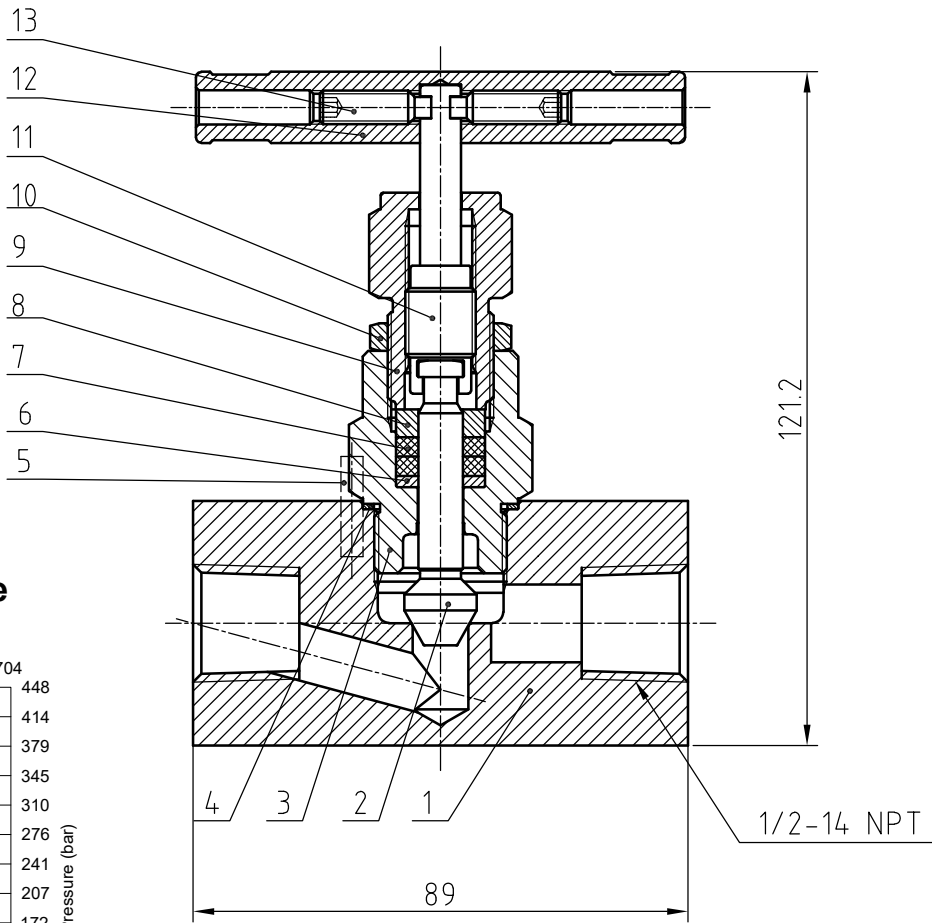


Valve Features	
Maximum working pressure	6000psig(414bar)
Working temperature	-65°F~1200°F (-54℃~649℃)
Orifice	0.39in.(10mm)
CV	2.18

idx	designation	materials
1	Body	316L/A479
2	Lower Stem	316L/A479
3	Bonnet	316L/A479
4	Gaskets	316L/A479
5	Spring Washer	Stainless steel
6	Packing Washer	316L/A479
7	Packing	Graphite
8	Packing Washer	316L/A479
9	Packing Bolt	316L/A479
10	Lock Nut	316L/A479
11	Upper Stem	316L/A479
12	Handle	Anodized aluminum
13	Set Screw	stainless steel

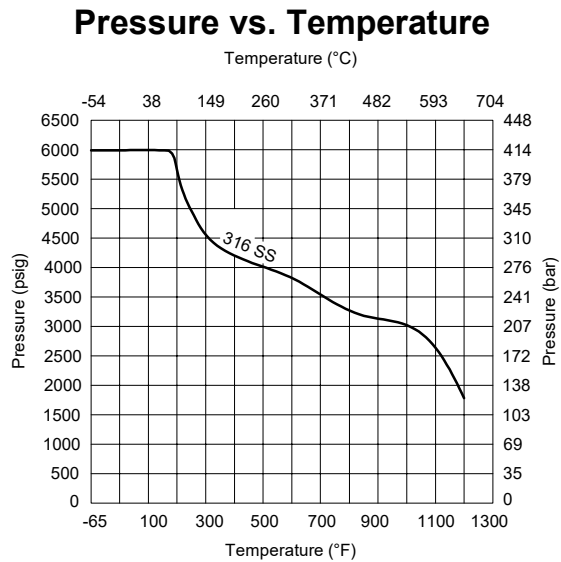

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	3:1
audit			 			VN3-2C-F-8N-GF-S
ratify						
			Page 1/1			