



Valve Features	
Maximum working pressure	5000 psig
Working temperature	-54 °C~232 °C
Orifice	4mm
Cv	0.35

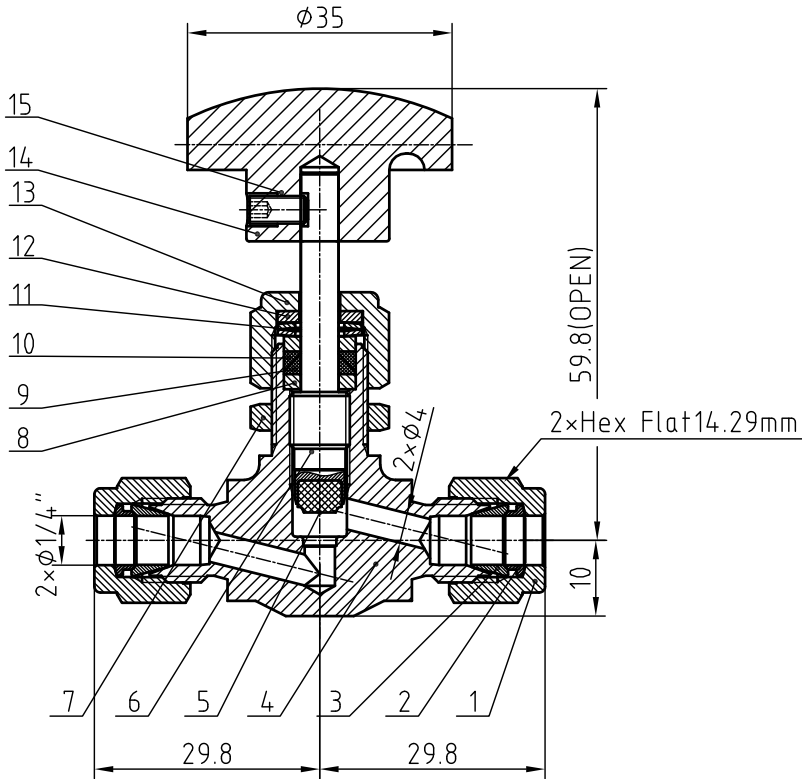

IDX	Designation	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	Body	F316 L/A182
5	Stem Tip	PEEK
6	Stem	316 L/A4 79
7	Panel Nut	316L/A4 79
8	Packing Washer	316 L/A4 79
9	Lower Packing	PTFE
10	Upper Packing	PTFE
11	Packing Spring	S17700/A693
12	Washer	316 L/A4 79
13	Packing Bolt	316 L/A4 79
14	Set Screw	Stainless steel
15	Handle	Nylon

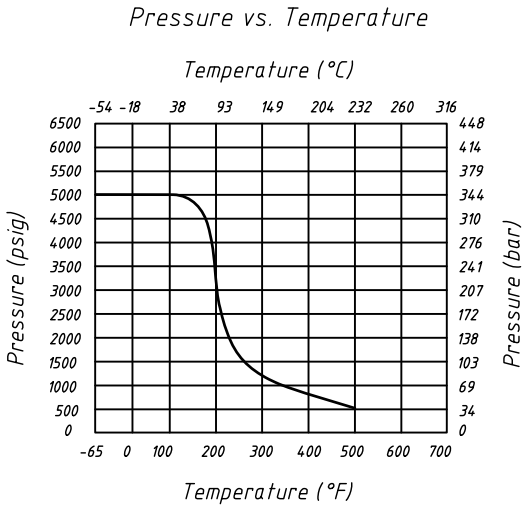

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit	✓	29.09.2025				VN5-2B-D-4T-N-S
ratify						
			Page 1/1			