
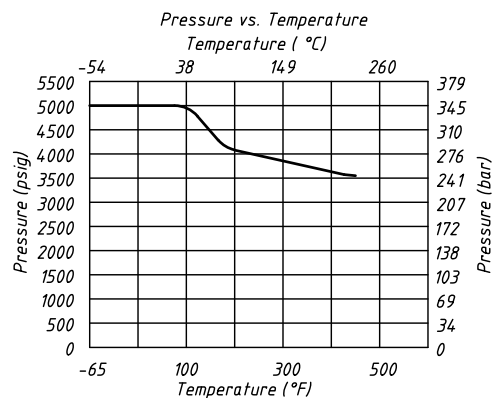
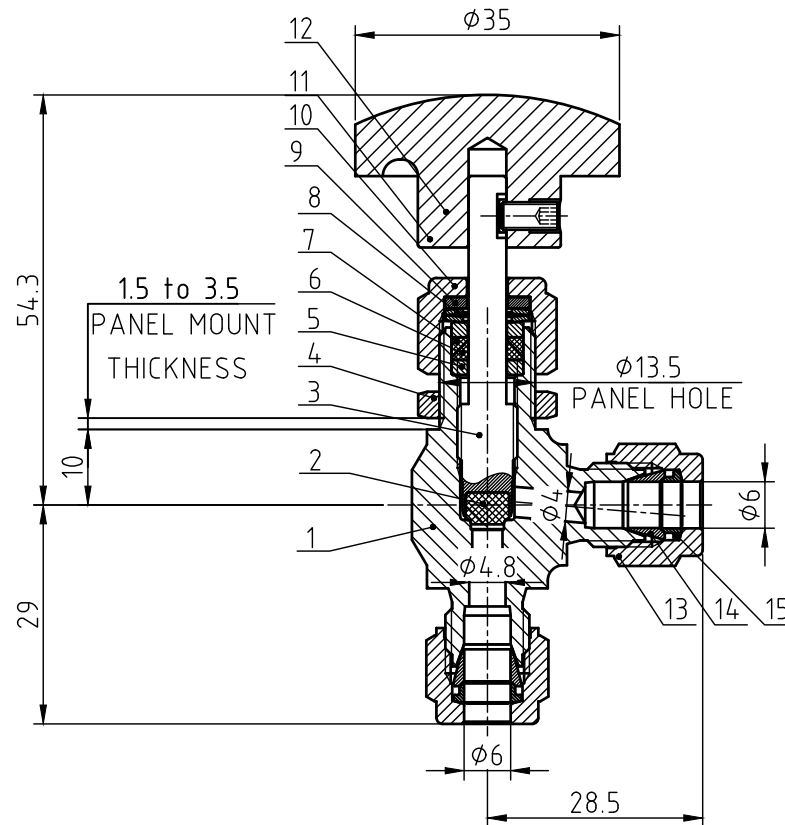


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232 °C
Orifice	0.16in.(4mm)
Cv	0.35



NOTE:Dimensions for reference only.

item	Component	Materials
1	Body	316 L/A182
2	Stem Tip	PTFE
3	Stem	316 L/A4 79
4	Panel Nut	Stainless steel
5	Packing Washer	316 L/A4 79
6	Lower Packing	PTFE
7	Upper Packing	PTFE
8	Packing Spring	S17700/A693
9	Washer	316 L/A4 79
10	Packing Bolt	316 L/A4 79
11	Handle	Nylon with Copper
12	Set Screw	Galvanized carbon steel
13	Nut	316 L/A4 79
14	Front Ferrules	316 L/A4 79
15	Rear Ferrules	316 L/A4 79

Linear unit of size: mm			Needle Valves			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date					
design			versions	1	proportion	1:1	VN5-2B-D-6M-A-R-N-NTA1-S
audit					Page 1/1		
ratify							