
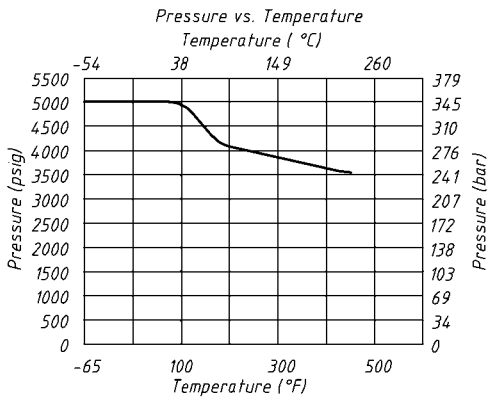


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232°C
Orifice	0.16in.(4mm)
Cv	0.35

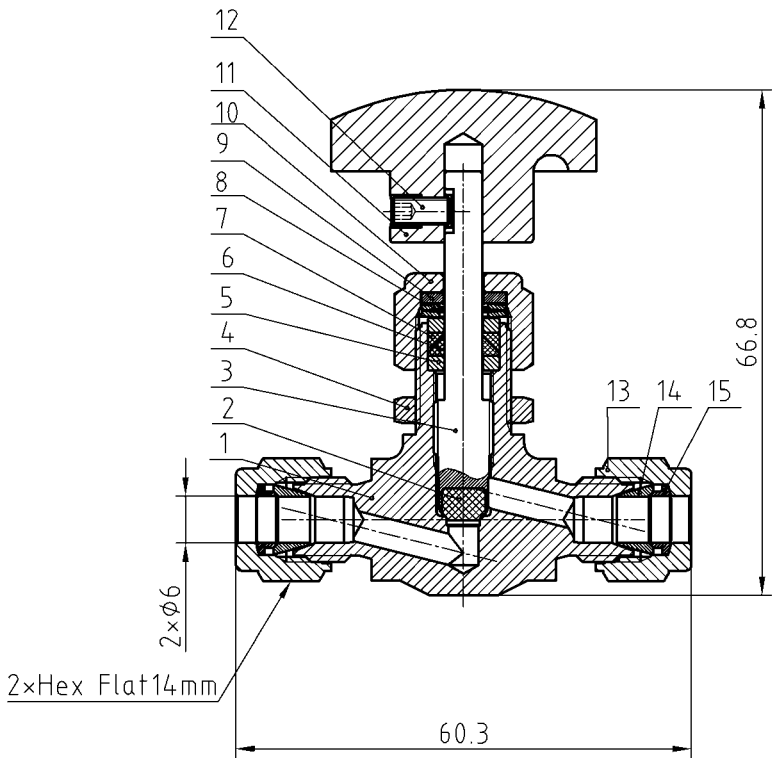

item	Component	Materials
1	Body	316 L/A182
2	Stem Tip	PTFE
3	Stem	316 L/A479
4	Panel Nut	Stainless steel
5	Packing Washer	316 L/A479
6	Lower Packing	PTFE
7	Upper Packing	PTFE
8	Packing Spring	S17700/A693
9	Washer	316 L/A479
10	Packing Bolt	316 L/A479
11	Handle	Nylon with Copper
12	Set Screw	Galvanized carbon steel
13	Nut	316 L/A479
14	Front Ferrules	316 L/A479
15	Rear Ferrules	316 L/A479

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valves			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN5-2B-D-6M-N-S
ratify						
			Page 1/1			