
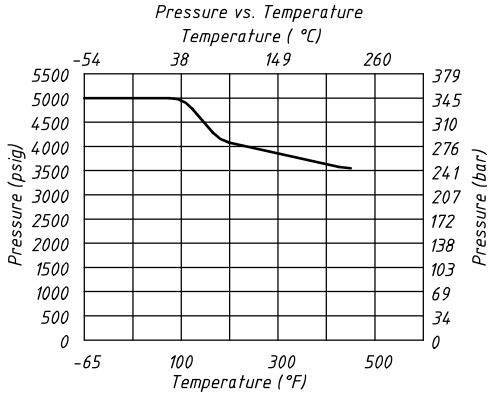


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232 °C
Orifice	0.16in.(4mm)
Cv	0.35

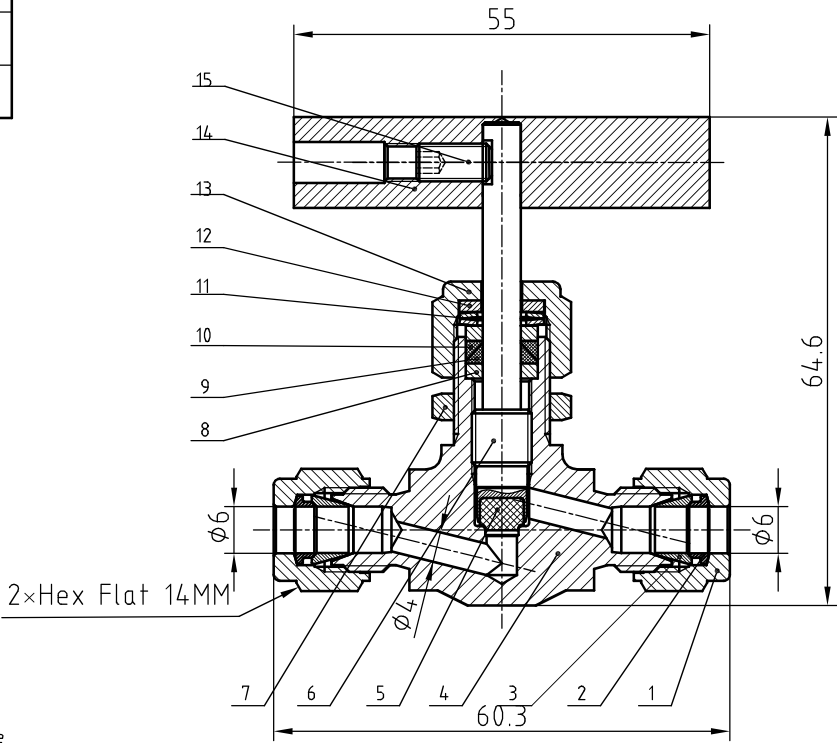

NOTE:Dimensions for reference only.

item	Component	Materials
1	Nut	316L/A4 79
2	Rear Ferrule	316L/A4 79
3	Front Ferrule	316L/A4 79
4	Body	F316 L/A182
5	Stem Tip	PTFE
6	Stem	316L/A4 79
7	Panel Nut	316L/A4 79
8	Packing Washer	316L/A4 79
9	Lower Packing	PTFE
10	Upper Packing	PTFE
11	Packing Spring	S17700/A693
12	Washer	316L/A4 79
13	Packing Bolt	316L/A4 79
14	Handle	316L/A4 79
15	Set Screw	Stainless steel

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN5-2B-D-6M-SH-N-S
ratify						
			Page 1/1			