



Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232 °C
Orifice	0.25in.(6.4mm)
Cv	0.7

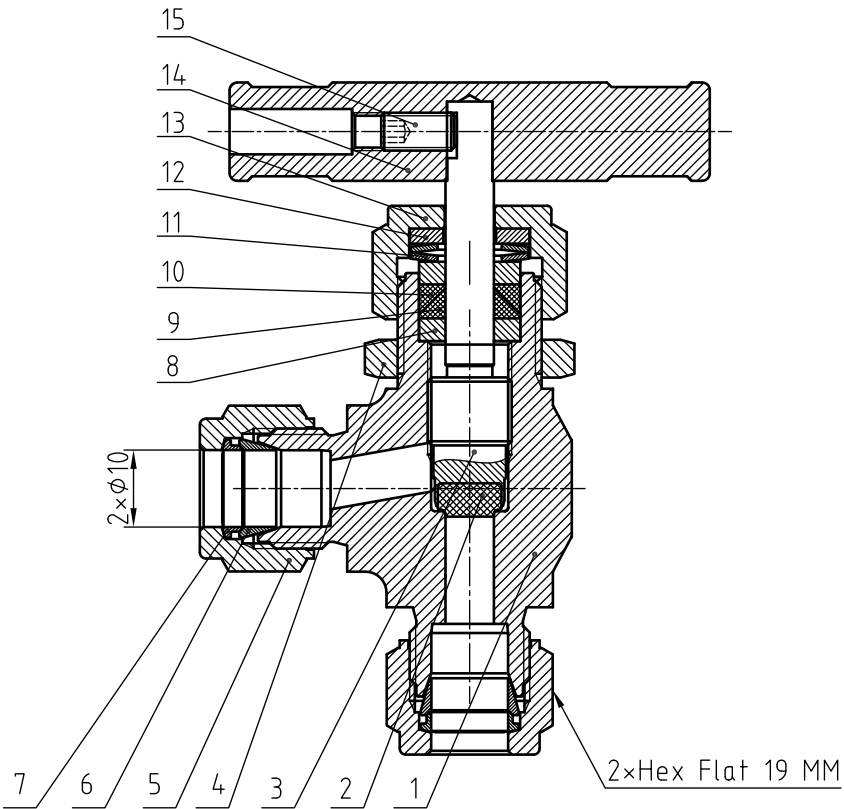

item	Component	Materials
1	Body	316 L/A182
2	Stem Tip	PCTFE
3	Stem	316 L/A4 79
4	Panel Nut	304
5	Nut	316 L/A4 79
6	Front Ferrules	316 L/A4 79
7	Rear Ferrules	316 L/A4 79
8	Packing Washer	316 L/A4 79
9	Lower Packing	PTFE
10	Upper Packing	PTFE
11	Packing Spring	S17700/A693
12	Washer	316 L/A4 79
13	Packing Bolt	316 L/A4 79
14	Handle	304
15	Set Screw	Galvanized carbon steel

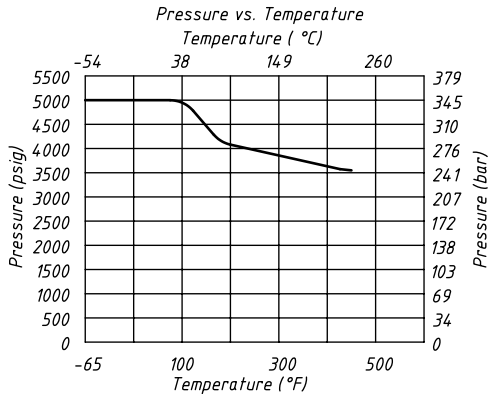

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN5-2C-D-10M-A-K-SH-N-S
ratify						
			Page 1/1			