

Valve Features					
Maximum working pressure	5000psig				
Working temperature	-54℃~232℃				
Orifice	6.4mm				
cv	0.7				

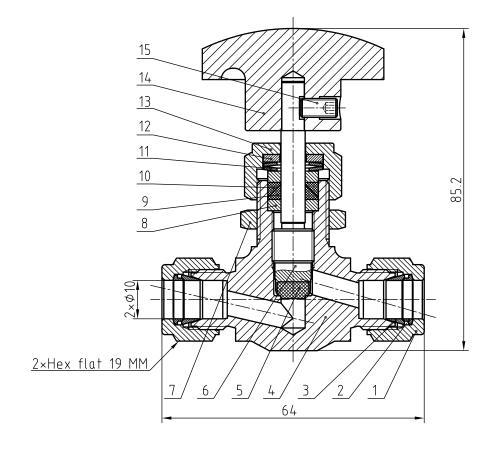

IDX	designation	materials			
1	Nut	316 L/A182			
2	Fear Ferrules	316 L/A479			
3	Front Ferrules	316 L/A479			
4	Body	316 L/A479			
5	Stem Tip	PCTFE			
6	Stem	316 L/A479			
7	Panel Nut	316 L/A479			
8	Packing Washer	316 L/A479			
9	Lower Packing	PTFE			
10	Upper Packing	PTFE			
11	Packing Spring	S17700/A693			
12	Washer	316 L/A479			
13	Packing Bolt	316 L/A479			
14	Handle	Nylon with Copper			
15	Set Screw	Galvanized carbon steel			

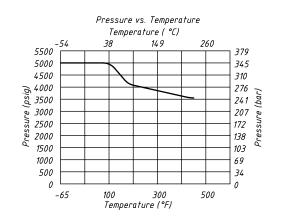

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date				TEXTIONOLVIAL TEMETINAL OF BAIL	
design			versions	1	proportion	1: 1	
audit							VN5-2C-D-10M-K-N-S
ratify				\bigoplus	Page	1/1	

NOTE:Dimensions for reference only.