
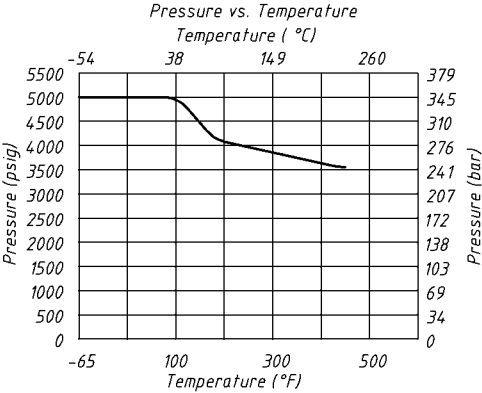
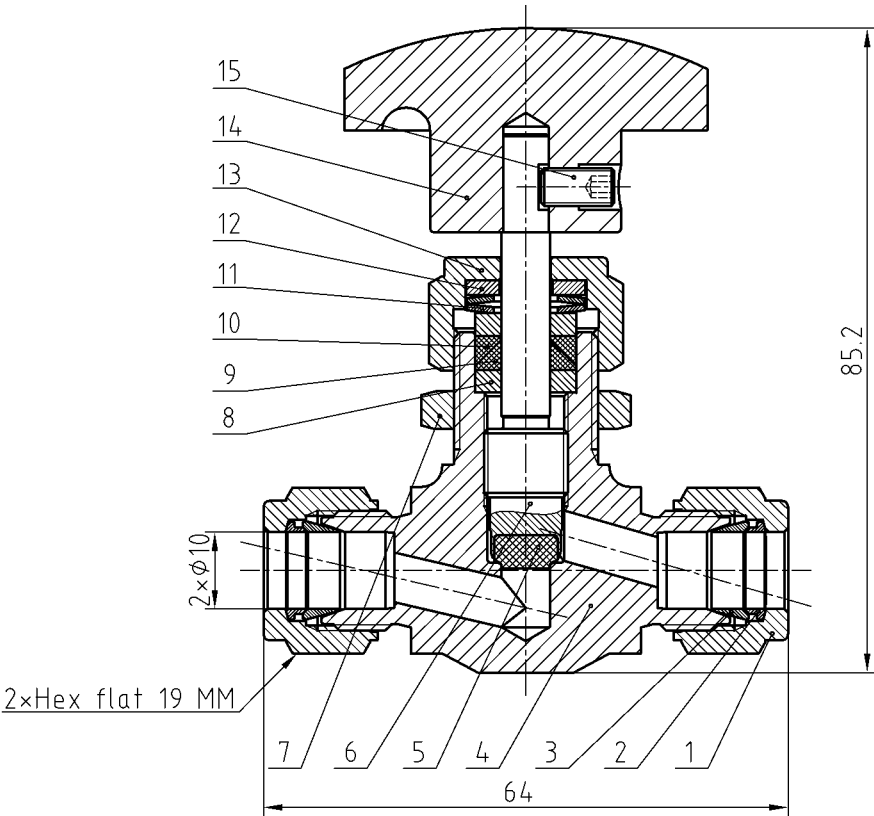


Valve Features	
Maximum working pressure	3000psig
Working temperature	-54℃~232℃
Orifice	6.4mm
CV	0.7



NOTE:Dimensions for reference only.

IDX	designation	materials
1	nut	316 L/A479
2	rear Ferrules	316 L/A479
3	Front Ferrules	316 L/A479
4	Body	316 L/A479
5	Stem Tip	PEEK
6	Stem	316 L/A479
7	Panel Nut	316 L/A479
8	Packing Washer	316 L/A479
9	Lower Packing	PTFE
10	Upper Packing	PTFE
11	Packing Spring	S17700/A693
12	Washer	316 L/A479
13	Packing Bolt	316 L/A479
14	Handle	Nylon
15	Set Screw	Galvanized carbon steel

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit			 Page 1/1			VN5-2C-D-10M-N-S
ratify						