
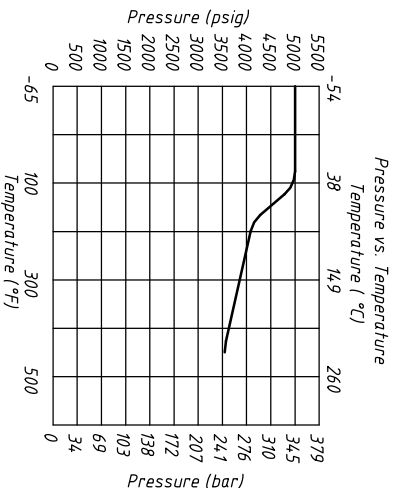


Valve Features	
Maximum working pressure	5000 psig
Working temperature	-54°C~232°C
Orifice	6.4mm
Cv	0.7

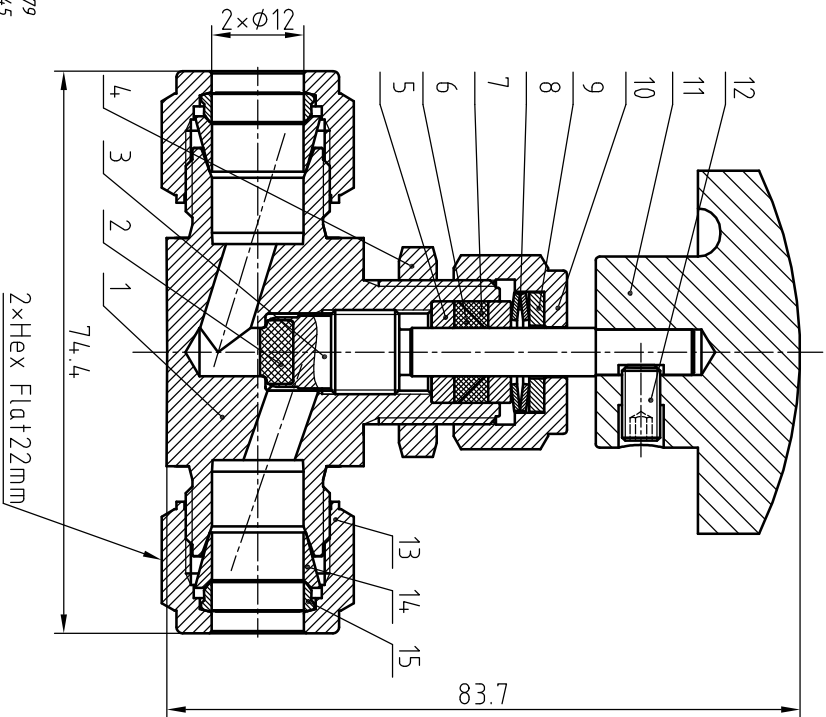

item	Component	Materials
1	Body	321SS/A4 79
2	Stem Tip	PEEK
3	Stem	316 SS/A4 79
4	Panel Nut	316 SS/A4 79
5	Packing Washer	316 SS/A4 79
6	Lower Packing	PTFE
7	Upper Packing	PTFE
8	Packing Spring	S17700/A693
9	Washer	316 SS/A4 79
10	Packing Bolt	316 SS/A4 79
11	Handle	Nylon with Copper
12	Set Screw	Stainless steel
13	Nut	316 SS or 321SS
14	Front Ferrules	316 SS or 321SS
15	Rear Ferrules	316 SS or 321SS

Linear unit of size: mm		Needle Valve			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС		
	signature					date	
design							
audit							
ratify							
		versions	1	proportion	1:1		
				Page 1/1	VN5-2C-D-12M-N-321		

NOTE:Dimensions for reference only.