
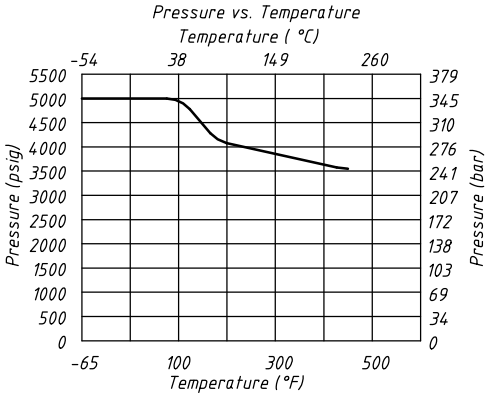
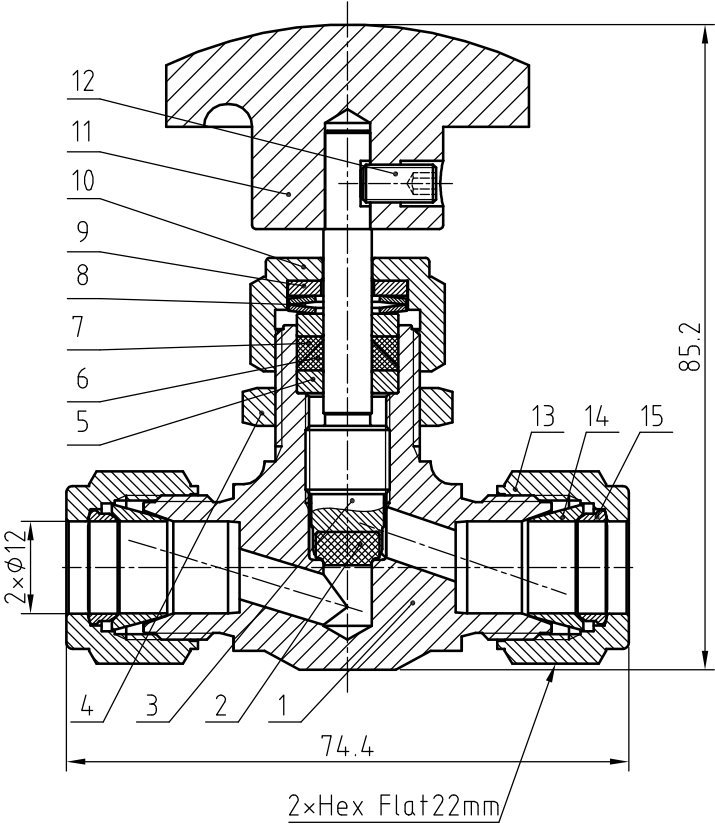


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232 °C
Orifice	0.25in.(6.4mm)
Cv	0.7



NOTE:Dimensions for reference only.

item	Component	Materials
1	Body	316L/A182
2	Stem Tip	PEEK
3	Stem	316L/A4 79
4	Panel Nut	Stainless steel
5	Packing Washer	316L/A4 79
6	Lower Packing	PTFE
7	Upper Packing	PTFE
8	Packing Spring	S17700/A693
9	Washer	316L/A4 79
10	Packing Bolt	316L/A4 79
11	Handle	Nylon with Copper
12	Set Screw	Galvanized carbon steel
13	Nut	316L/A4 79
14	Front Ferrules	316L/A4 79
15	Rear Ferrules	316L/A4 79

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit			 Page 1/1			VN5-2C-D-12M-N-S
ratify						