
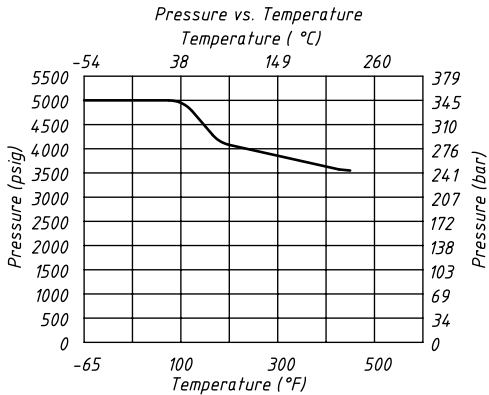


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54 °C~232°C
Orifice	0.25in.(6.4mm)
Cv	0.7

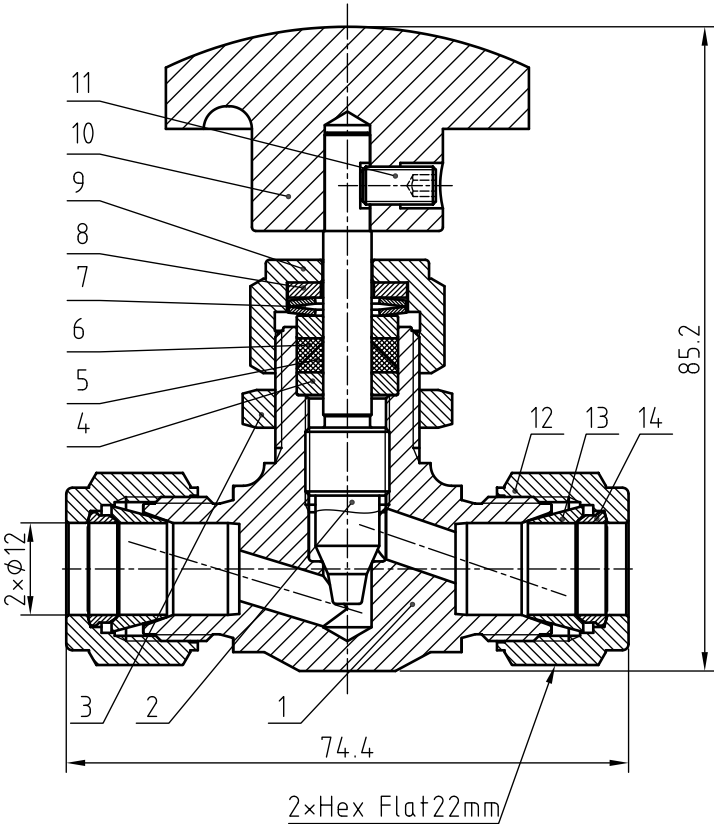

item	Component	Materials
1	Body	316 L/A182
2	Stem	316 L/A4 79
3	Panel Nut	304
4	Packing Washer	316 L/A4 79
5	Lower Packing	PTFE
6	Upper Packing	PTFE
7	Packing Spring	S17700/A693
8	Washer	316 L/A4 79
9	Packing Bolt	316 L/A4 79
10	Handle	Nylon with Copper
11	Set Screw	Galvanized carbon steel
12	Nut	316 L/A4 79
13	Front Ferrules	316 L/A4 79
14	Rear Ferrules	316 L/A4 79

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN5-2C-D-12M-R-N-S
ratify						
			Page 1/1			