
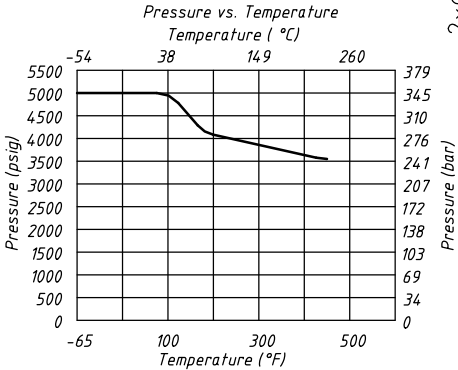
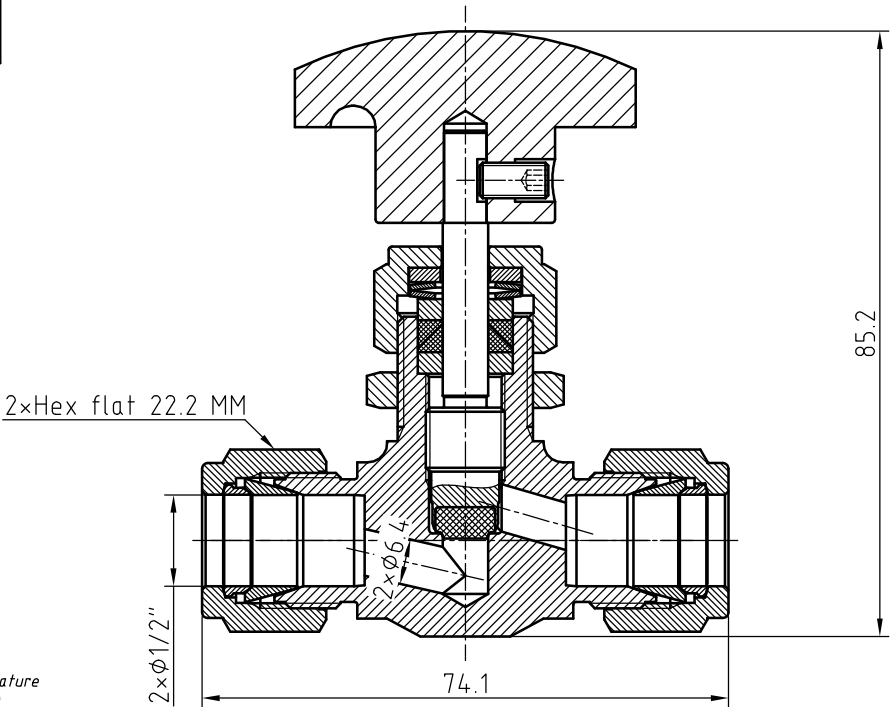


Valve Features	
Maximum working pressure	5000 psig (345bar)
Working temperature	-54°C~232°C
Orifice	0.25in.(6.4mm)
Cv	0.7



NOTE:Dimensions for reference only.

IDX	Designation	Materials
1	Nut	316 L/A479
2	Rear Ferrules	316 L/A479
3	Front Ferrules	316 L/A479
4	Body	316 L/A479
5	Stem Tip	PEEK
6	Stem	316 L/A479
7	Panel Nut	316 L/A479
8	Packing Washer	316 L/A479
9	Lower Packing	PTFE
10	Upper Packing	PTFE
11	Packing Spring	S17700/A693
12	Washer	316 L/A479
13	Packing Bolt	316 L/A479
14	Handle	Nylon
15	Set Screw	Carbon Steel

Linear unit of size: mm			Needle Valve				НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design			versions	1	proportion	1:1	VN5-2C-D-8T-N-S	
audit					Page 1/1			
ratify								