



Valve Features	
Maximum working pressure	6000 psig (413bar)
Working temperature	-54 °C~232 °C
Orifice	0.16in.(4.0mm)
Cv	0.35

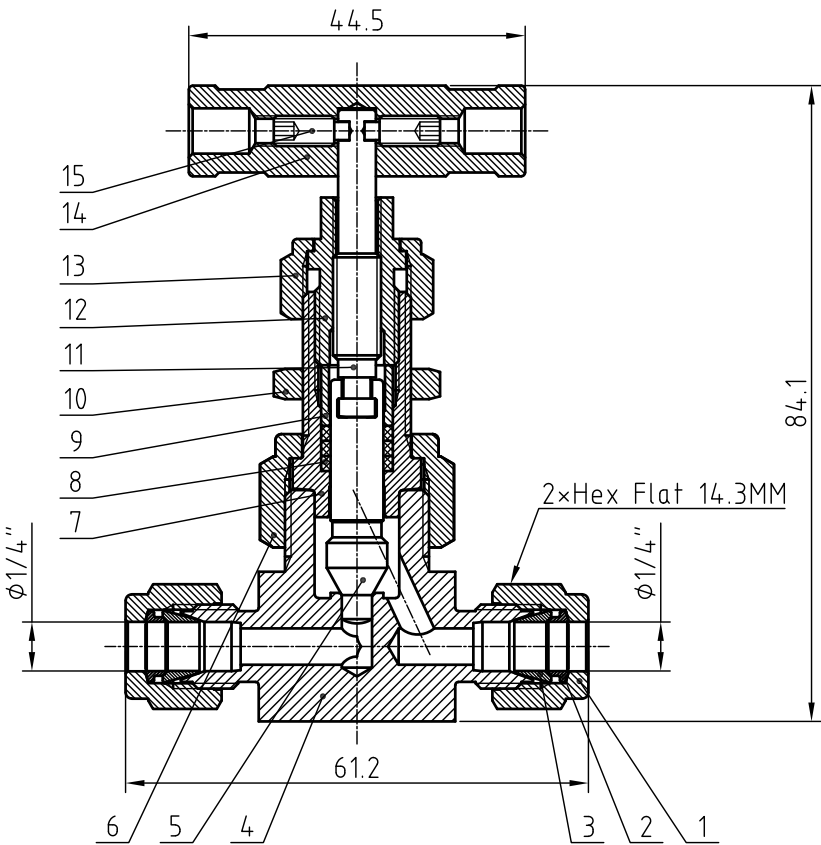

Item	Component	Material
1	Nut	316L/ASTM A479
2	Rear Ferrule	316L/ASTM A479
3	Front Ferrule	316L/ASTM A479
4	Body	316L/ASTM A479
5	Lower Stem	316L/ASTM A479
6	Union Nut	316L/ASTM A479
7	Bonnet	316L/ASTM A479
8	Packing	PTFE
9	Gland	316L/ASTM A479
10	Panel Nut	316L/ASTM A479
11	Upper Stem	316L/ASTM A479
12	Packing Bolt	316L/ASTM A479
13	Locking Nut	316L/ASTM A479
14	Handle	6061/B211
15	Set Screw	Stainless Steel

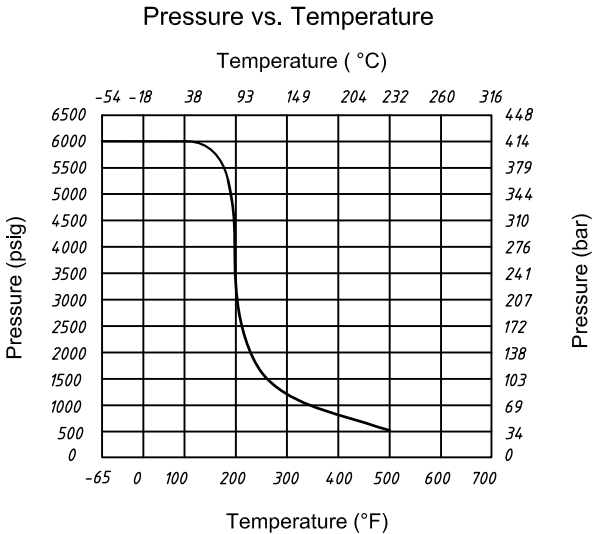

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve		НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date			
design			versions	1	proportion 1:1
audit			 		VN8-2A-D-4T-R-S
ratify					
			Page 1/1		