| Valve Features | |
|---|---|
| Maximum working pressure | 6000psig (414bar) |
| Working temperature | -54℃~232℃ |
| Orifice | 0.16in. (4mm) |
| cv | 0.35 |

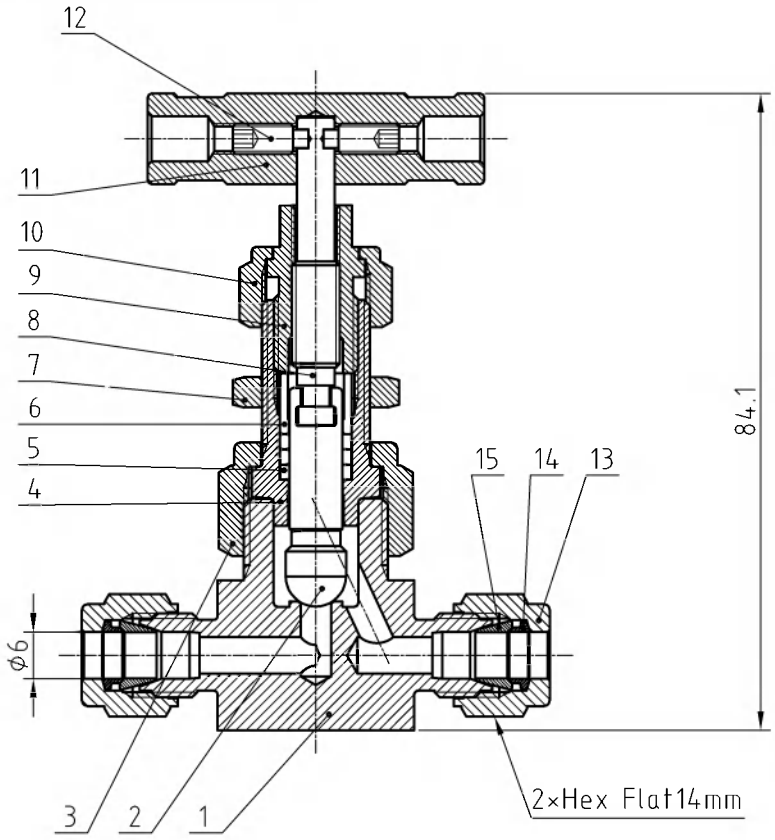


| Item | Component | Material |
|---|---|---|
| 1 | Body | 316 L/A479 |
| 2 | Lower Stem | 316 L/A479 |
| 3 | Union Nut | 316 L/A479 |
| 4 | Bonnet | 316 L/A479 |
| 5 | Packing | PTFE |
| 6 | Gland | 316 L/A479 |
| 7 | Panel Nut | 316 L/A479 |
| 8 | Upper Stem | 316 L/A479 |
| 9 | Packing Bolt | 316 L/A479 |
| 10 | Locking Nut | 316 L/A479 |
| 11 | Handle | 304 |
| 12 | Set Screw | Stainless Steel |
| 13 | Nut | 316 L/A479 |
| 14 | Rear Ferrules | 316 L/A479 |
| 15 | Front Ferrules | 316 L/A479 |

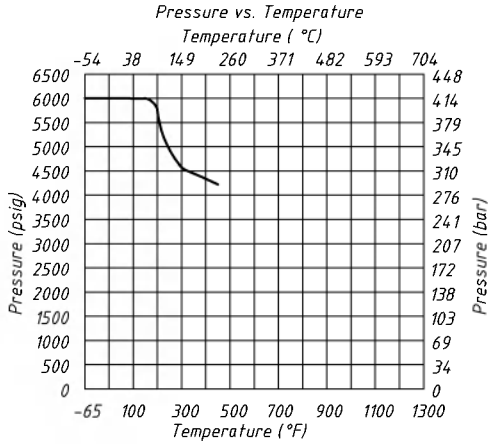


NOTE:Dimensions for reference only.

| Linear unit of size: mm | | | Needle valves | | | | НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС |
|---|---|---|---|---|---|---|---|
| | signature | date | | | | | |
| design | | | versions | 1 | proportion | 1:1 | VN8-2A-D-6M-B-N-S |
| audit | | | | | | | |
| ratify | | | | | Page 1/1 | | |