




Valve Features	
Maximum working pressure	6000Psig (414bar)
Working temperature	-54℃~232℃
Orifice	4.0MM
Cv	0.35

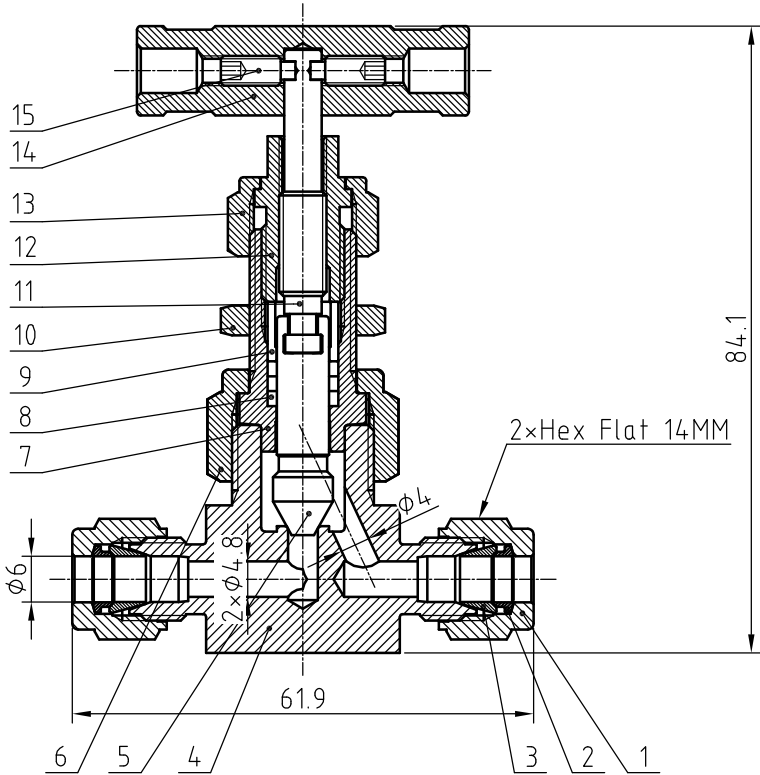

Item	Component	Material
1	Nut	316L / A4 79
2	Rear Ferrule	316L / A4 79
3	Front Ferrule	316L / A4 79
4	Body	316L / A4 79-NACE
5	Lower Stem	316L / A4 79-NACE
6	Union Nut	316L / A4 79
7	Bonnet	316L / A4 79-NACE
8	Packing	PTFE
9	Gland	316L / A4 79
10	Panel Nut	316L / A4 79
11	Upper Stem	316L / A4 79-NACE
12	Packing Bolt	316L / A4 79
13	Locking Nut	316L / A4 79
14	Handle	6061/B211
15	Set Screw	Stainless Steel

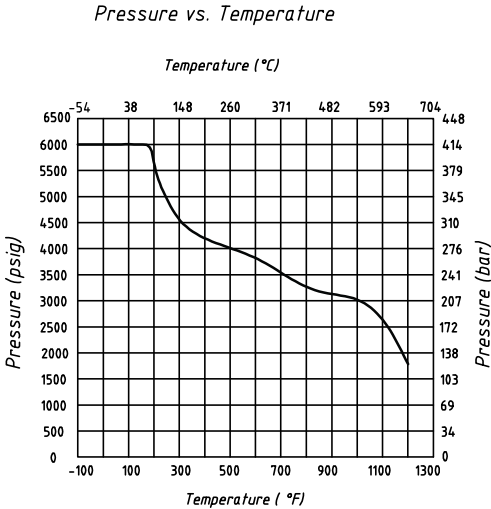

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date					
design			versions	1	proportion	1:1	VN8-2A-D-6M-N-SG-S
audit	✓	11.09.2025			Page 1/1		
ratify							