



Valve Features	
Maximum working pressure	6000psig (414bar)
Working temperature	-54℃~232℃
Orifice	0.16in. (4mm)
Cv	0.35

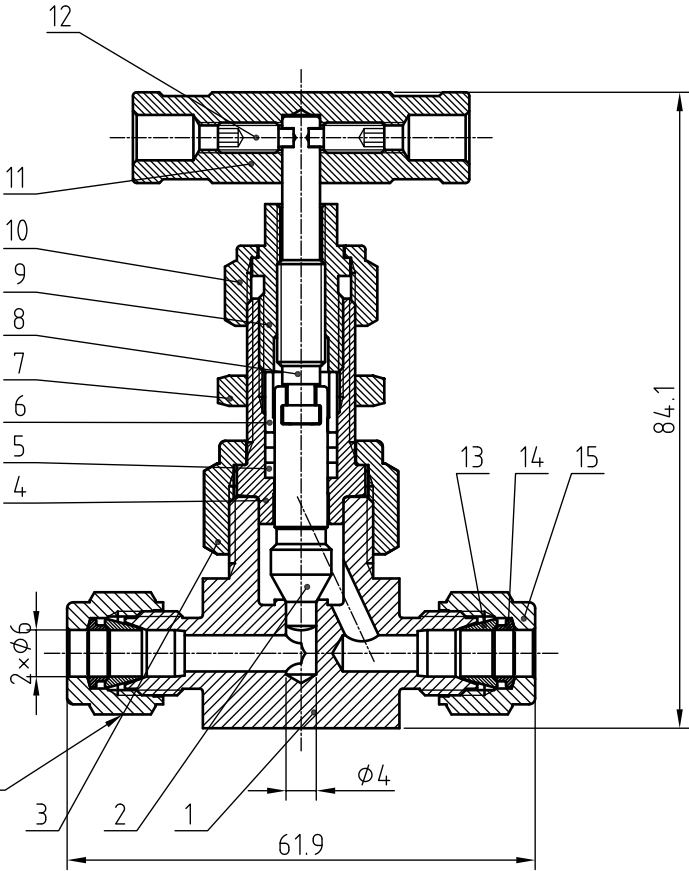

Item	Component	Material
1	Body	316 L/A4 79
2	Stem Tip	316 L/A4 79
3	Union Nut	316 L/A4 79
4	Bonnet	316 L/A4 79
5	Packing	PTFE
6	Gland	316 L/A4 79
7	Panel Nut	316 L/A4 79
8	Stem	316 L/A4 79
9	Packing Bolt	316 L/A4 79
10	Locking Nut	316 L/A4 79
11	Handle	304
12	Set Screw	Stainless Steel
13	Front Ferrules	316 L/A4 79
14	Rear Ferrules	316 L/A4 79
15	Nut	316 L/A4 79

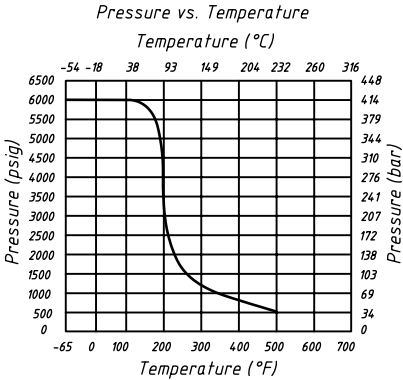

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN8-2A-D-6M-R-N-S
ratify						
			Page 1/1			