



Valve Features	
Maximum working pressure	6000 psig
Working temperature	-54 °C~232 °C
Orifice	4mm
Cv	0.35

2xHex Flat 16MM

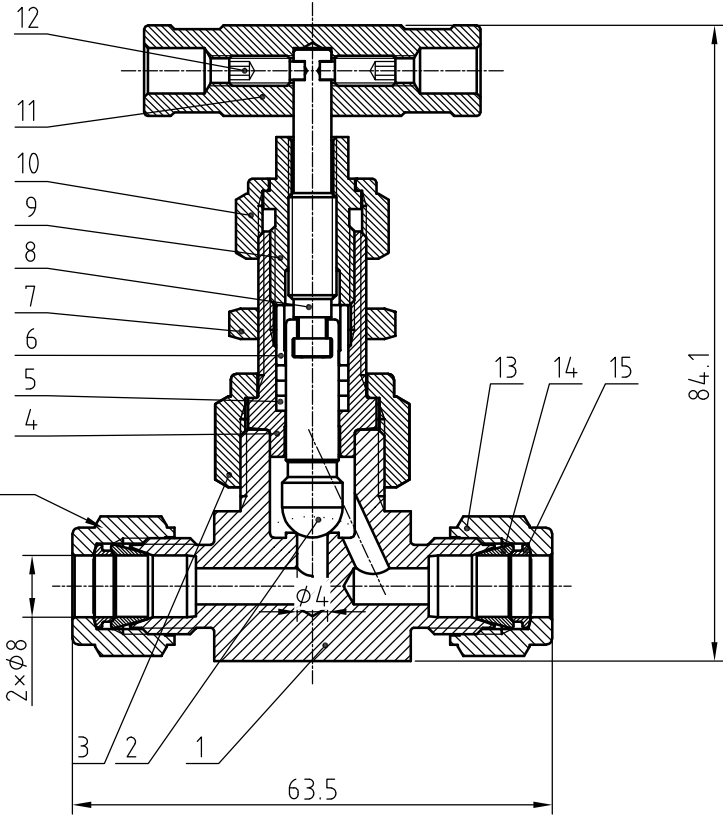

Pressure vs. Temperature

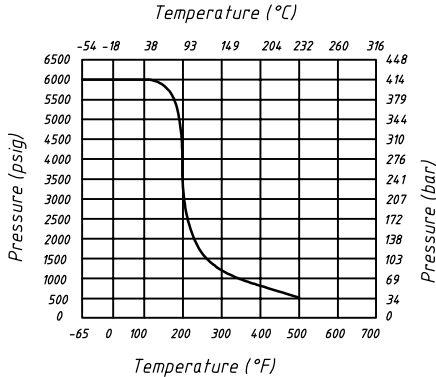

NOTE:Dimensions for reference only.

Item	Component	Materials
1	Body	316 L/A4 79
2	Lower Stem	316 L/A4 79
3	Union Nut	316 L/A4 79
4	Bonnet	316 L/A4 79
5	Packing	PTFE
6	Gland	316 L/A4 79
7	Panel Nut	316 L/A4 79
8	Upper Stem	316 L/A4 79
9	Packing Bolt	316 L/A4 79
10	Lock Nut	316 L/A4 79
11	Handle	Anodized aluminium
12	Set Screw	304
13	Nut	316 L/A4 79
14	Rear Ferrules	316 L/A4 79
15	Front Ferrules	316 L/A4 79

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN8-2A-D-8M-B-N-S
ratify						
			Page 1/1			