




Valve Features	
Maximum working pressure	6000psig
Working temperature	-54℃~649℃
Orifice	4.0MM
cv	0.35

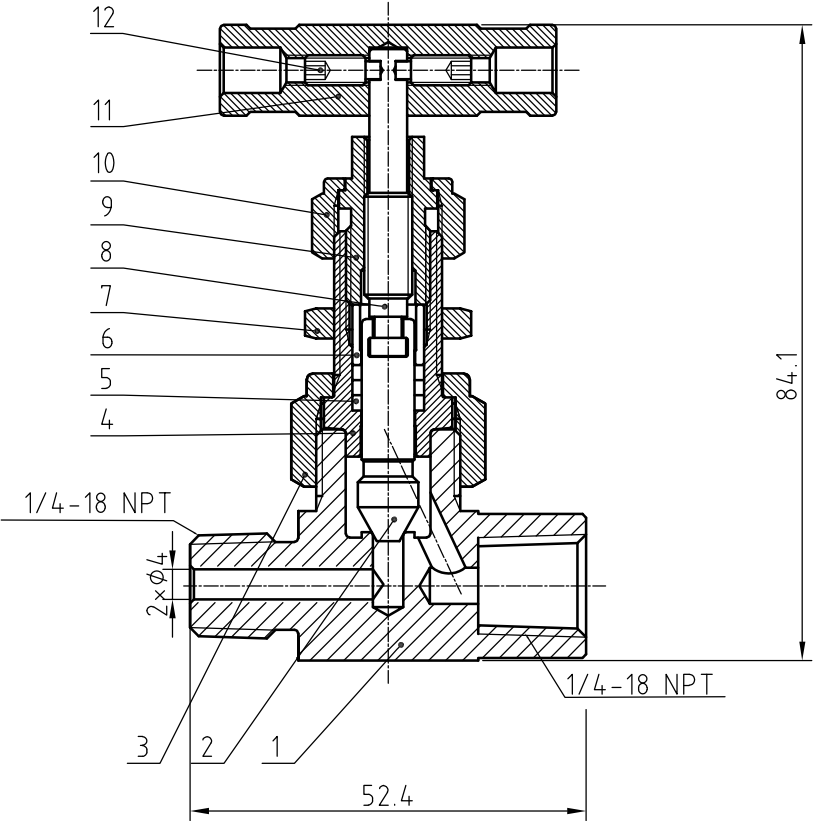

Item	Component	Material
1	Body	316L/ASTM A479
2	Lower Stem	316L/ASTM A479
3	Union Nut	316L/ASTM A479
4	Bonnet	316L/ASTM A479
5	Packing	Graphite
6	Gland	316L/ASTM A479
7	Panel Nut	316L/ASTM A479
8	Upper Stem	316L/ASTM A479
9	Packing Bolt	316L/ASTM A479
10	Locking Nut	316L/ASTM A479
11	Handle	6061/B211
12	Set Screw	Stainless Steel

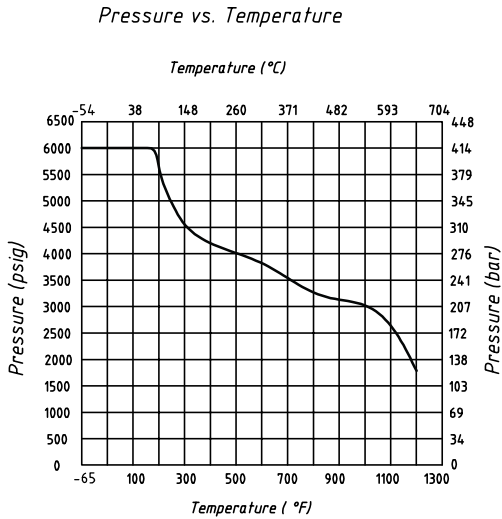

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN8-2A-MF-4N-GF-N-S
ratify						
			Page 1/1			