
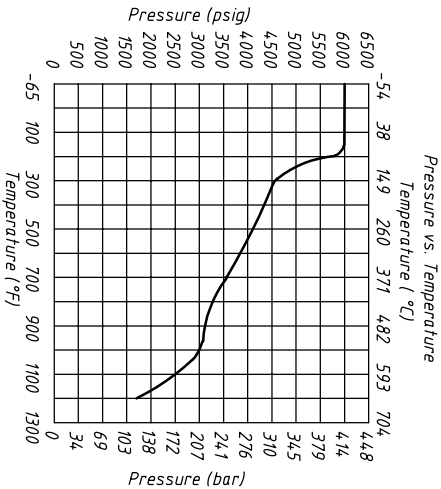


Valve Features	
Maximum working pressure	6000 psig (4.13bar)
Working temperature	-54°C~232°C
Orifice	0.25in.(6.4mm)
Cv	0.86

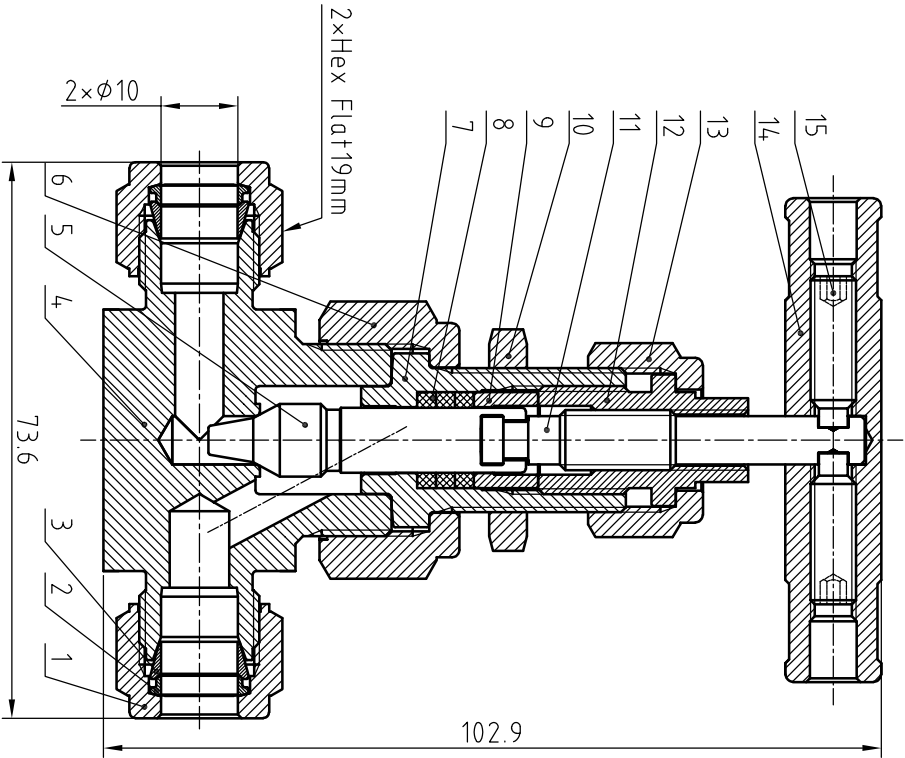

item	Component	Materials
1	Nut	316 SS/A4.79
2	Rear Ferrules	316 SS/A4.79
3	Front Ferrules	316 SS/A4.79
4	Body	316 SS/A4.79
5	Lower Stem	316 SS/A4.79
6	Union Nut	316 SS/A4.79
7	Bonnet	316 SS/A4.79
8	Packing	PTFE
9	Gland	316 SS/A4.79
10	Panel Nut	316 SS/A4.79
11	Upper Stem	316 SS/A4.79
12	Packing Bolt	316 SS/A4.79
13	Lock Nut	316 SS/A4.79
14	Handle	Anodized aluminium
15	Set Screw	304

Linear unit of size: mm			Needle Valves				HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date						
design								
audit								
ratify			versions	1	proportion	1:1	VN8-2B-D-10M-R-S	
					Page 1/1			

NOTE:Dimensions for reference only.