


Valve Features	
Maximum working pressure	6000 psig (413bar)
Working temperature	-54°C~93°C
Orifice	0.25in.(6.4mm)
Cv	0.8

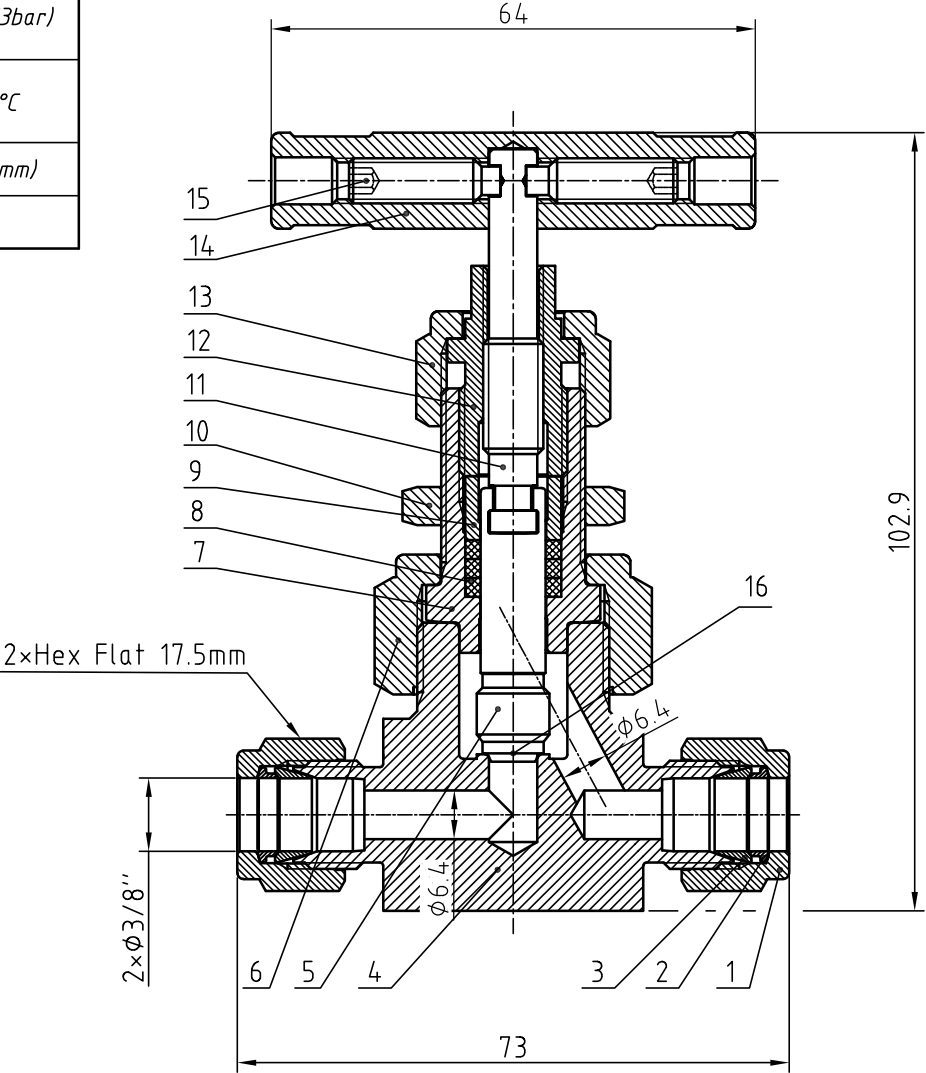

item	Component	Materials
1	Nut	316 L/A4 79
2	Rear Ferrules	316 L/A4 79
3	Front Ferrules	316 L/A4 79
4	Body	316 L/A4 79
5	Lower Stem	316 L/A4 79
6	Union Nut	316 L/A4 79
7	Bonnet	316 L/A4 79
8	Packing	PTFE
9	Gland	316 L/A4 79
10	Panel Nut	316 L/A4 79
11	Upper Stem	316 L/A4 79
12	Packing Bolt	316 L/A4 79
13	Lock Nut	316 L/A4 79
14	Handle	Anodized aluminium
15	Set Screw	304
16	Stem Tip	PCTFE

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN8-2B-D-6T-K-N-S
ratify						
			Page 1/1			