



Valve Features	
Maximum working pressure	6000 psig (413bar)
Working temperature	-54 °C~232 °C
Orifice	0.25in.(6.4mm)
Cv	0.86

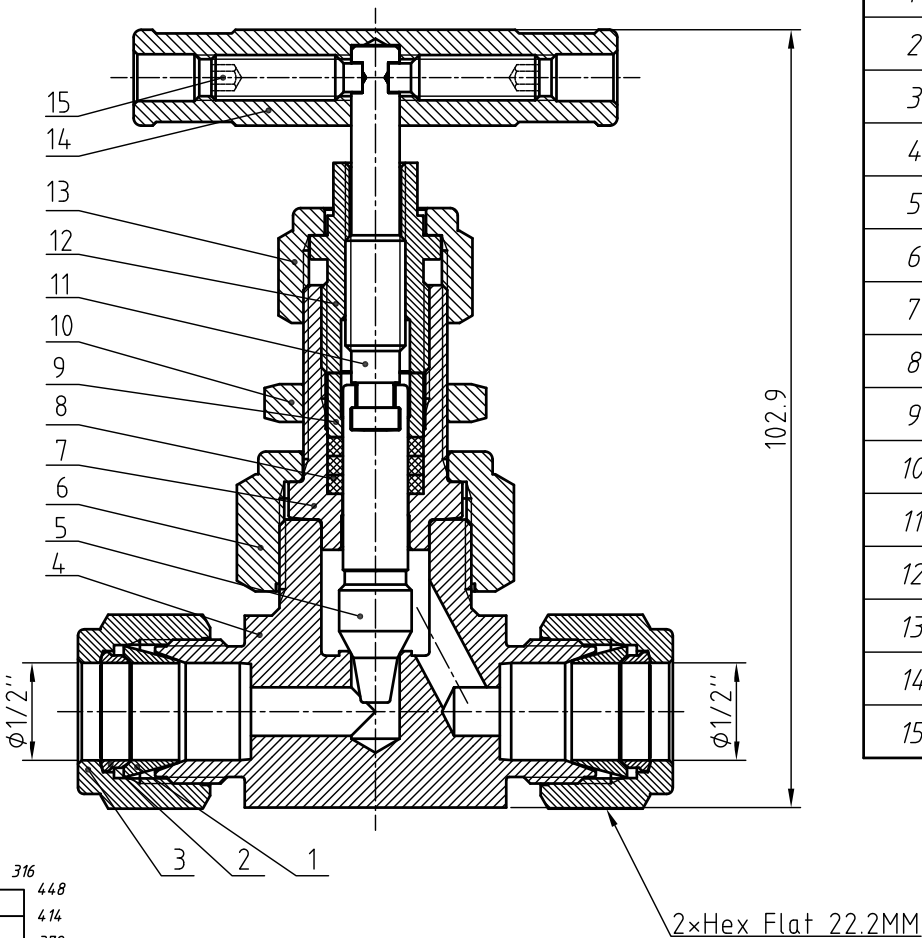

item	Component	Materials
1	Front Ferrule	316L/A479
2	Rear Ferrule	316L/A479
3	Nut	316L/A479
4	Body	316L/A479
5	Lower Stem	Hardened 316 L/A479
6	Union Nut	316L/A479
7	Bonnet	316L/A479
8	Packing	PTFE
9	Gland	316L/A479
10	Panel Nut	316L/A479
11	Upper Stem	316L/A479
12	Packing Bolt	316L/A479
13	Lock Nut	316L/A479
14	Handle	Anodized aluminium
15	Set Screw	Carbon steel

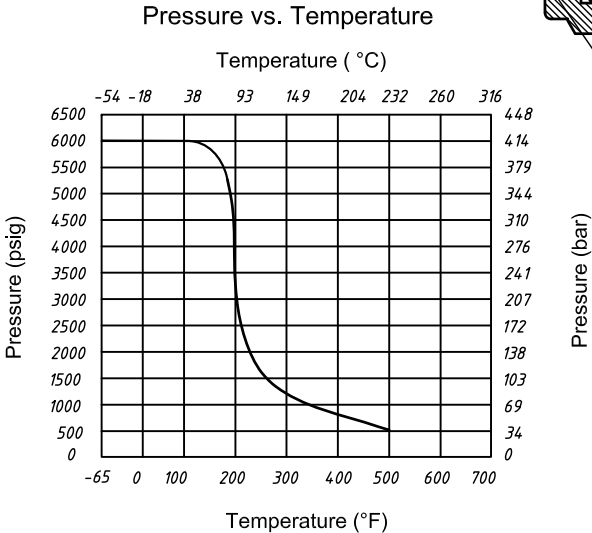

NOTE:Dimensions for reference only.

Linear unit of size: mm			Needle Valve			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:1
audit						VN8-2B-D-8T-R-S
ratify						
			Page 1/1			