
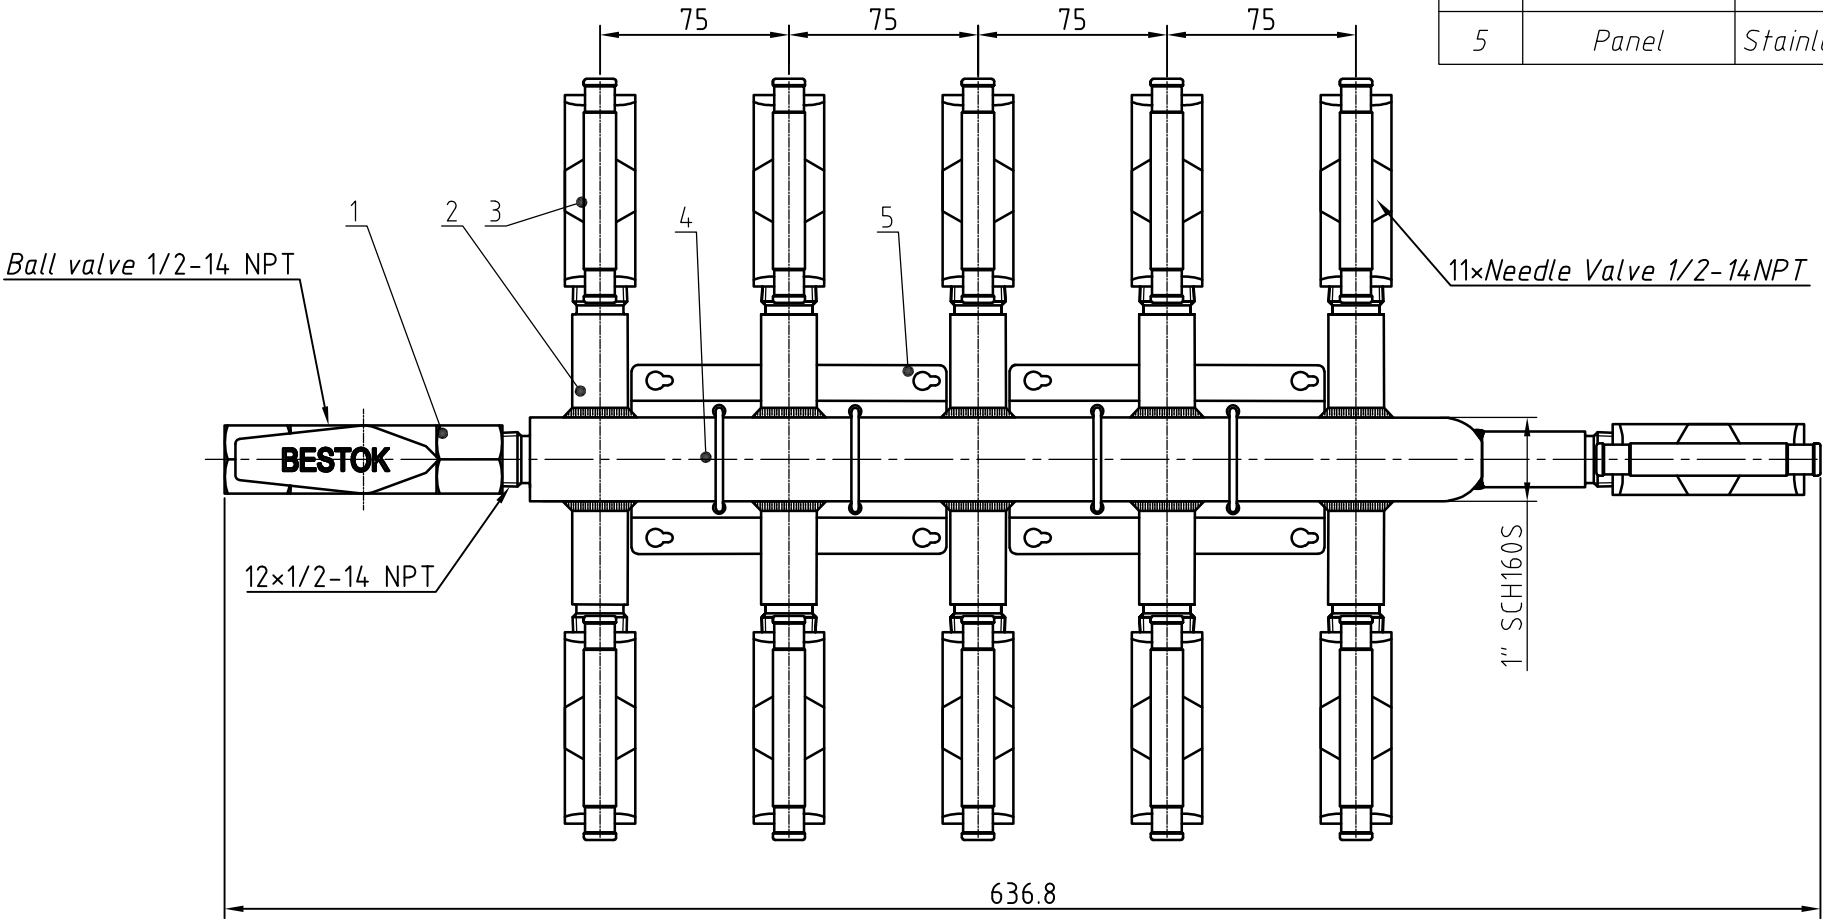


Features		
Maximum working pressure	Main Line	1000psig(69bar)@-328°F -572°F (-200℃~300℃)
	Ball valve	6000psig(414bar)@-65°F -450°F (-54℃-232℃)
	Needle Valve	6000psig(414bar)@-65~450°F (-54~232℃)

Item	component	Material
1	Ball valve	316 SS
2	Pipe	316 SS
3	Needle Valve	316 SS
4	Main Line	316 SS
5	Panel	Stainless Steel



Linear unit of size: mm			Gas Distributor			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:3
audit						ADM1-21-D10-B9F8N-VN1F8N-VN1F8N-S
ratify						
			Page 1/1			

NOTES:Dimensions for reference only